


Emergency

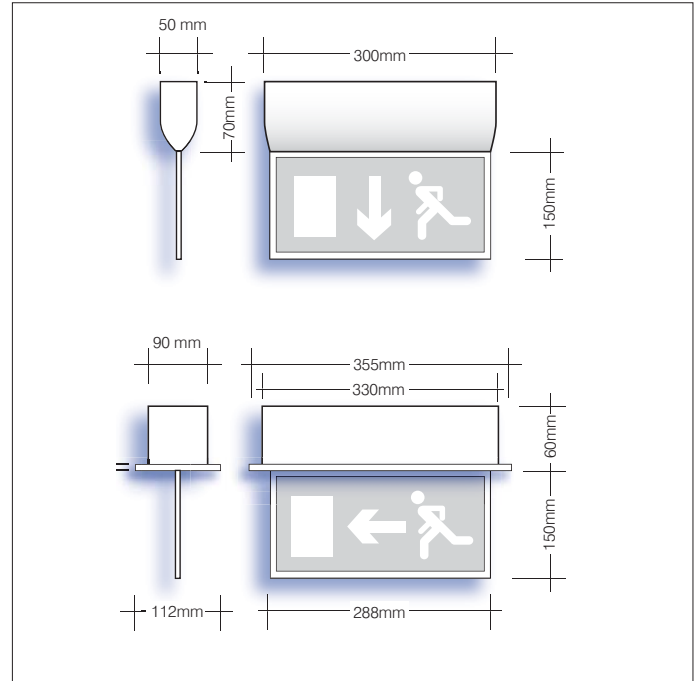

Options

- For self-test option suffix /ST
- For white option suffix /WHI
- For brass option suffix /BRS
- For chrome option suffix /CH

Key features

- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 100lm/W
- Emergency BLF = 150 lm
- Battery: 1 x 4.8V 0.9Ah NiCd
- Light source: 15 x 4500K LEDs (CRI>80)
- Weight: 3.0 kg
- Viewing Distance of 28M

Accessories

- Surface Mounting Bracket EX/SURF
- Suspended Wire Suspension Kit (1 m max) EX/WIRE
- Wall Mounting Bracket EX/WALL
- Rod Suspension Kit (specify 250mm or 500mm) EX/ROD

* EX1 standard finish brushed aluminium

Part No.

Description

EX1/M3*	Exit Sign Maintained
EX2/M3	Recessed Exit Sign Maintained

For more information, please contact Sales@ldl.lighting

