Walton

Linear Surface - Anti Ligiture

Innovation.
Collaboration.
Illumination.

Indoor Lighting

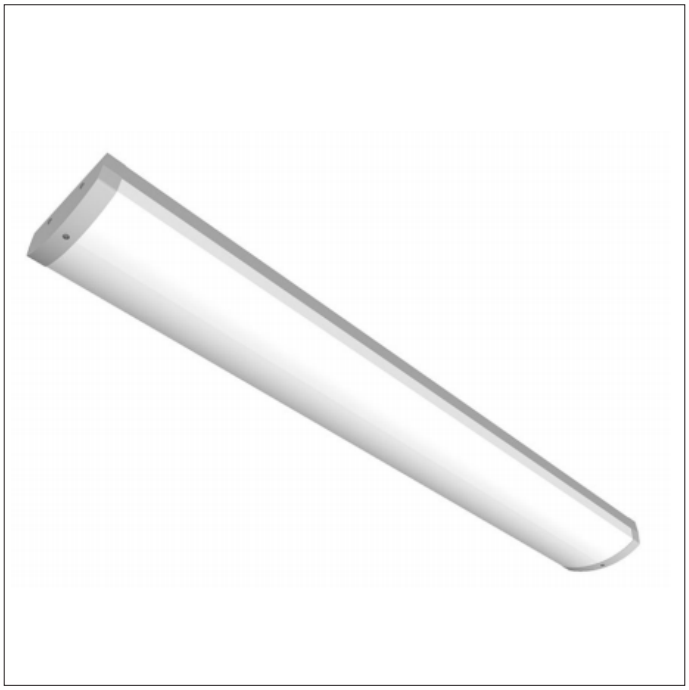

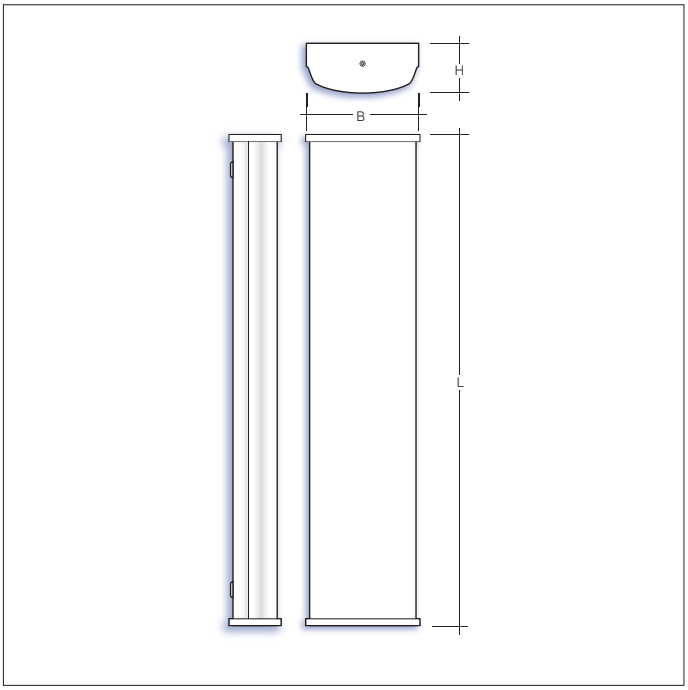

Overview

The Walton surface mounted luminaire incorporates the latest in LED technology and design resulting in a commercial / industrial surface mounted LED luminaire that meets the highest of specifications.

A prismatic opal TP(a) diffuser is fitted and is retained via endcaps secured by stainless steel anti-tamper screws.The body is formed from 1.0mm CR4 steel and finished in a high gloss electrostatic powder coating. Tridonic led boards and power supplies are fitted which gives excellent lumen performance results. The Walton is UGR<19, IK12 and IP54 as standard. An IP65 version is optional.

A number of variations are available including DALI dimmable, self-contained emergency and DALI emergency.

4000K CCT supplied as standard, 3000K available on request.

Options

- *For 3 hour Maintained Emergency option suffix* **/EMR**
- *For DALI Dimmable suffix* **/DIM**
- *For 3hr Self-test emergency suffix* **/MON**
- *For DALI 3hr emergency suffix* **/EMP**

i.e. **WAL/5/5967/4/DIMM/EMR =**
WALTON LED surface luminaire, 5967lm, 4K, DALI Dimmable c/w 3hr emergency.

Part No.	W	Lm	Lm/W	L
WAL/2/1432/4	10	1343	121	580
WAL/2/2387/4	17	2640	132	580
WAL/2/3325/4	25	3886	131	580
WAL/4/2864/4	19	5023	128	1190
WAL/4/4773/4	34	6148	123	1190
WAL/4/6650/4	50	1875	143	1190
WAL/5/3580/4	24	3470	143	1470
WAL/5/5967/4	42	5090	140	1470
WAL/5/8312/4	62	6557	136	1470

More options available, see www.LDL.lighting

Please note *Due to the continuous development in LED technology, specification values may change and we reserve the right to amend the details without prior notification.*