


# MILLIE Linear LED Luminaire

## Installation instructions

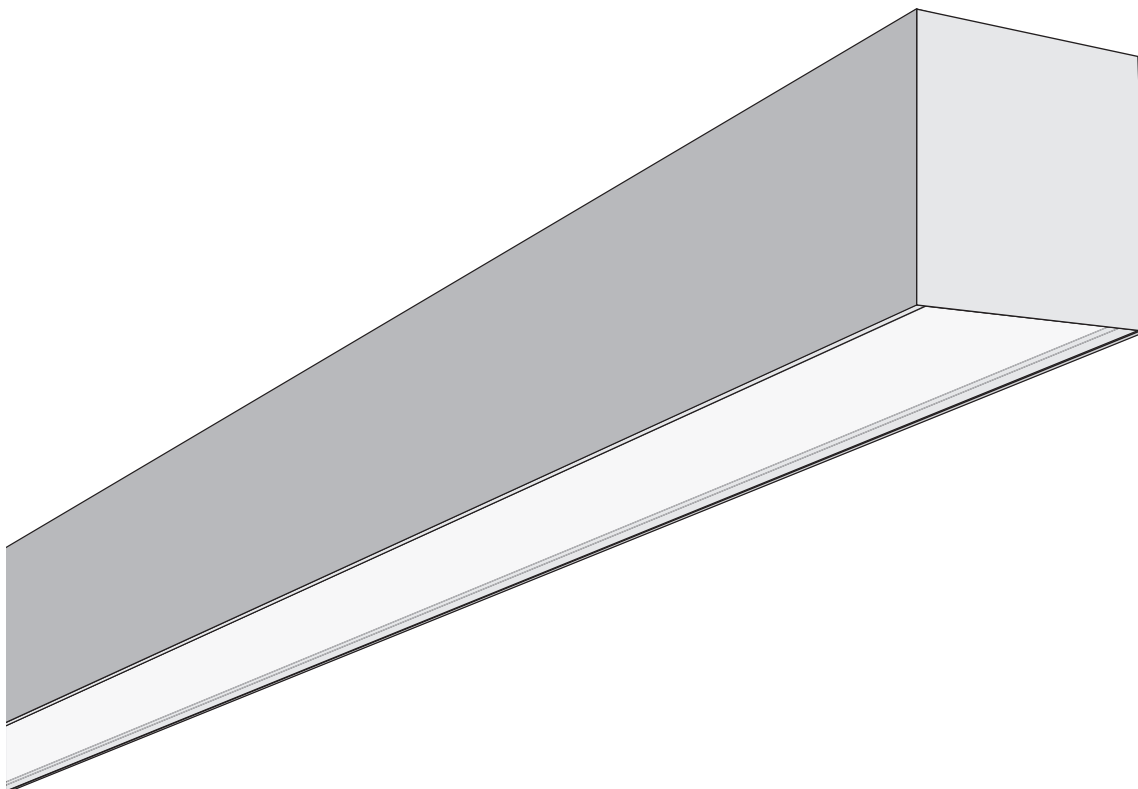

MIL/\*/05/\*\*\*\* L= 570mm

MIL/\*/08/\*\*\*\* L= 850mm

MIL/\*/11/\*\*\*\* L= 1130mm

MIL/\*/14/\*\*\*\* L= 1410mm

MIL/\*/16/\*\*\*\* L= 1690mm


MIL/\*/19/\*\*\*\* L= 1970mm

MIL/\*/22/\*\*\*\* L= 2250mm



## Removing LED





Use plastic tool to remove the gear tray.

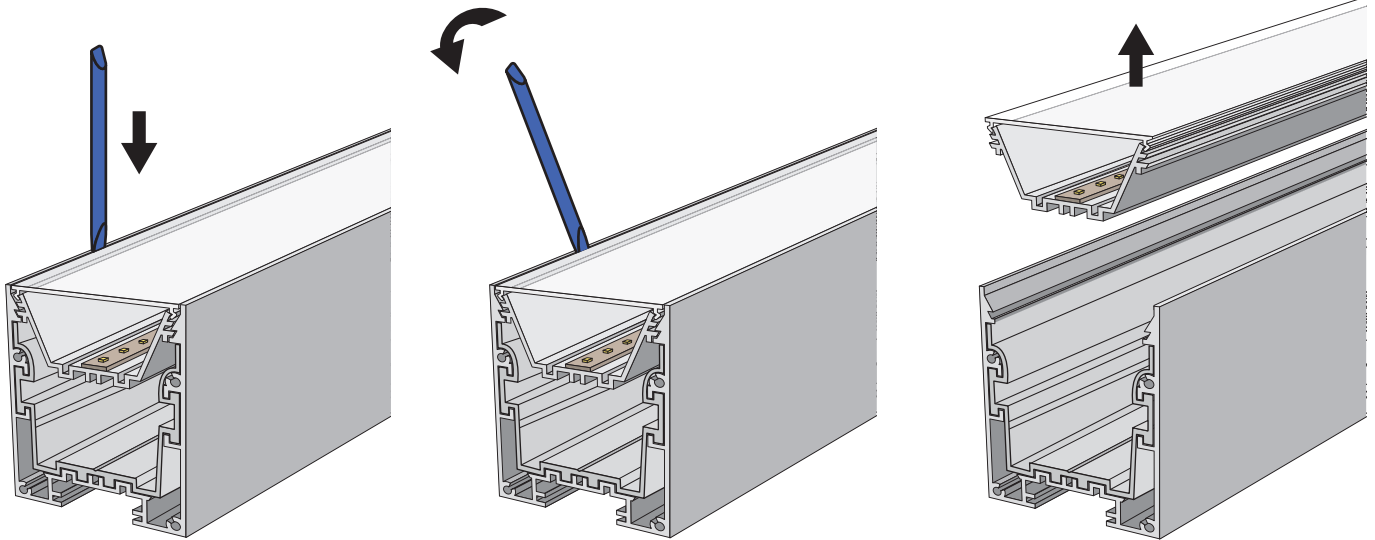

Drill hole for cable entry as required.  
Mains must be powered off.





# Wiring Information

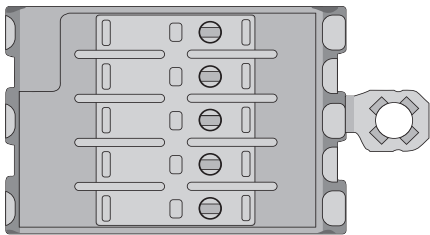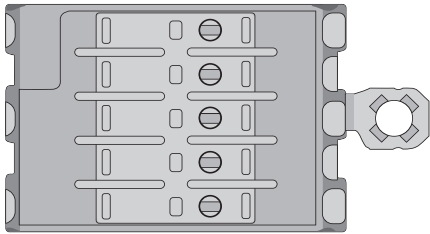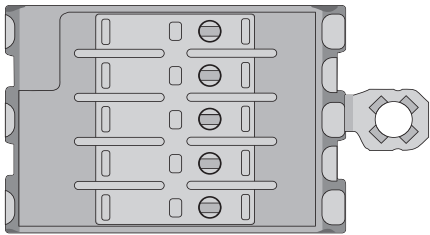		Standard	Standard with Emergency
<div>3</div> <div>N</div> <div>E</div> <div>1</div> <div>2</div> 		n/c	n/c
		Neutral	Neutral
		Earth	Earth
		Live	Switched Live
		n/c	Permanent Live
		Dali	
<div>L</div> <div>N</div> <div>E</div> <div>DA+</div> <div>DA-</div> 		Neutral	
		Earth	
		Live	
		Dali+	
		Dali-	
		Dali with Emergency	
<div>3</div> <div>N</div> <div>E</div> <div>1</div> <div>2</div> 		n/c	
		Neutral	
		Earth	
		Switched Live	
		Permanent Live	
<div>DA+</div> <div>DA-</div> 		Dali+	
		Dali-	

## Surface mounting




Drill holes for surface mounting as required.

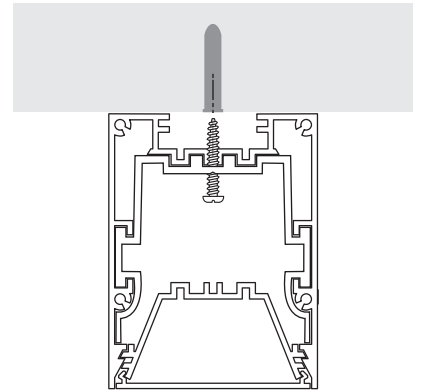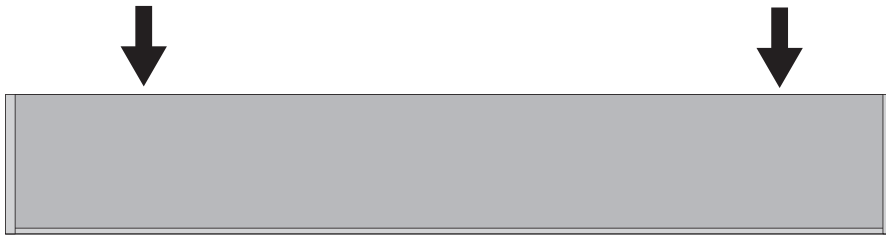


Drill holes in ceiling and fix with appropriate fasteners.

## Suspended mounting


Compress the suspension clip by hand only. Do not use tool. Insert into the slot as shown. Suspensions to be no more that 150mm from ends. Minimum number of suspensions: 2 per Millie up to 2250mm and 3 per Millie over 2250mm.

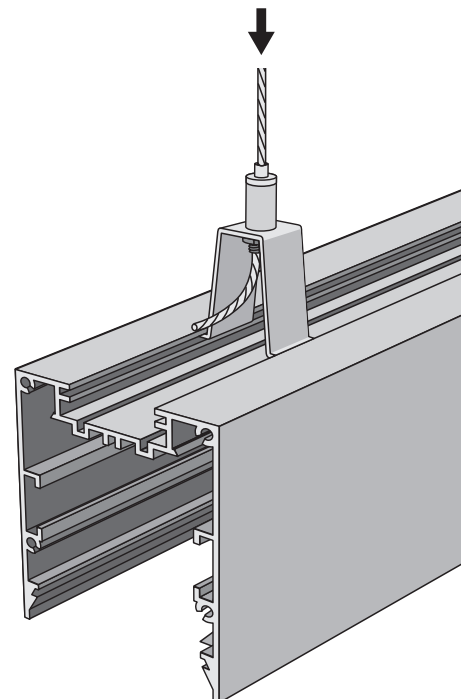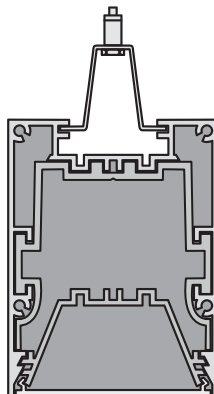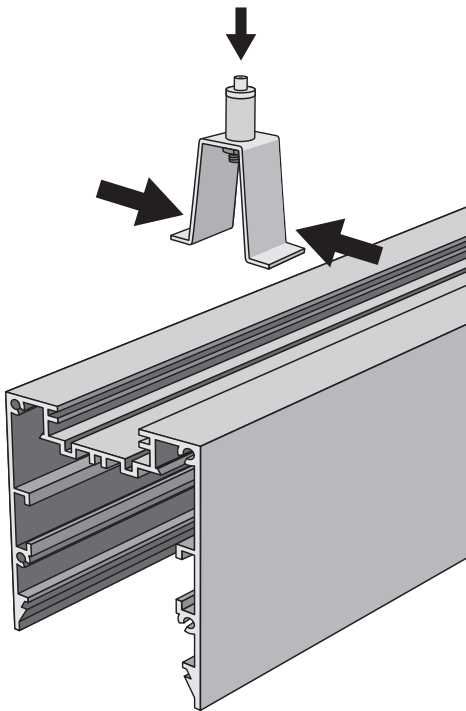


Install suspension wire to ceiling and thread into suspension clutch.

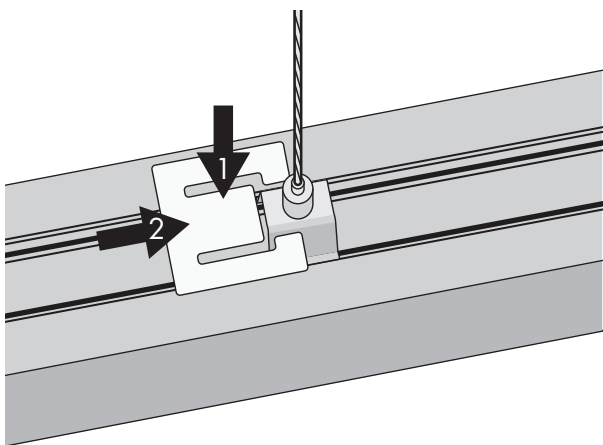


Fit packer clip as shown. Press down and then across until the arms are clipped in place.

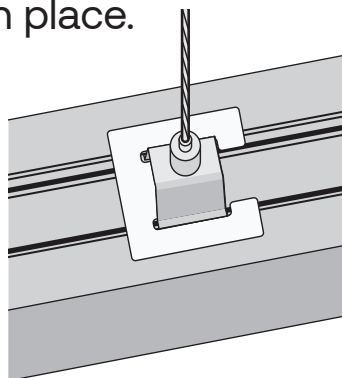


## Continuous with coupler

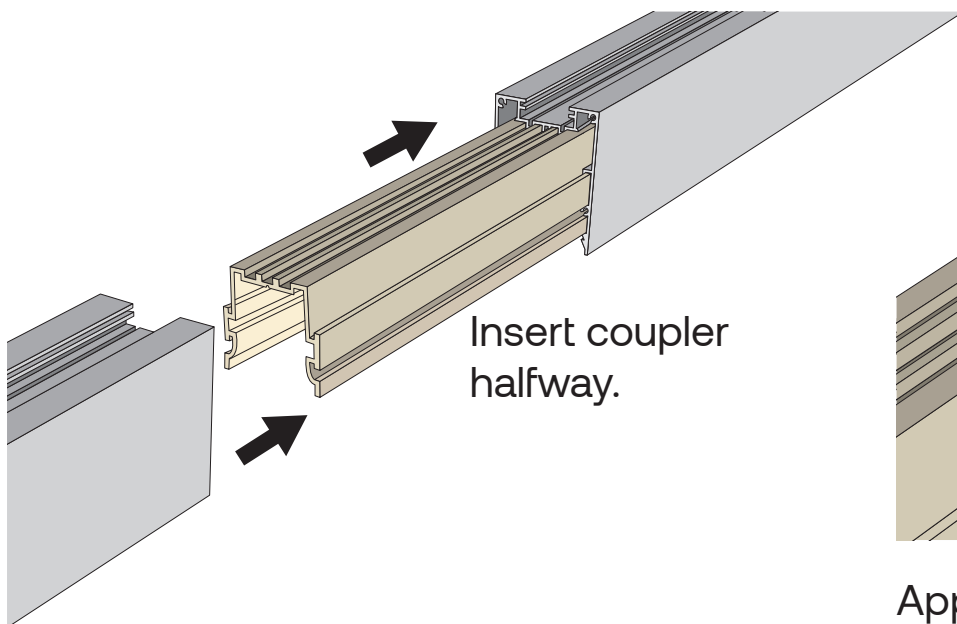

Insert coupler halfway.

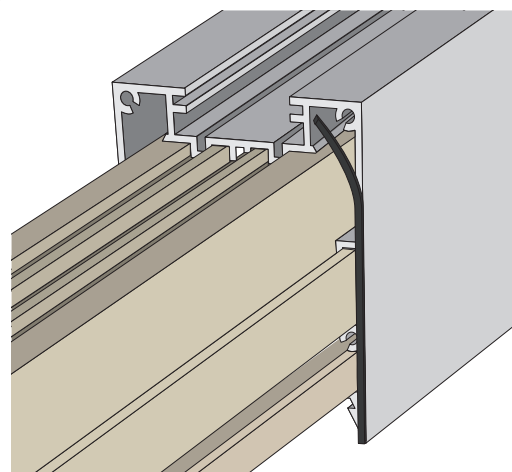


Apply gasket to joints as shown.



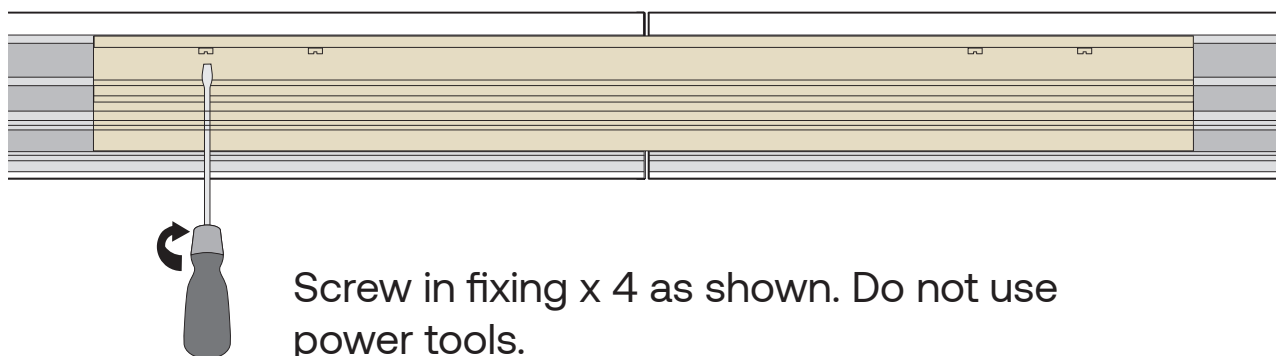


Screw in fixing x 4 as shown. Do not use power tools.

## Fit end caps

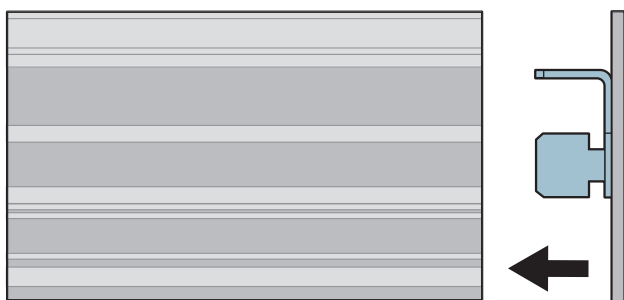

Insert endcap into extrusion.  
Screw through hole as shown.  
Do not use power tools.

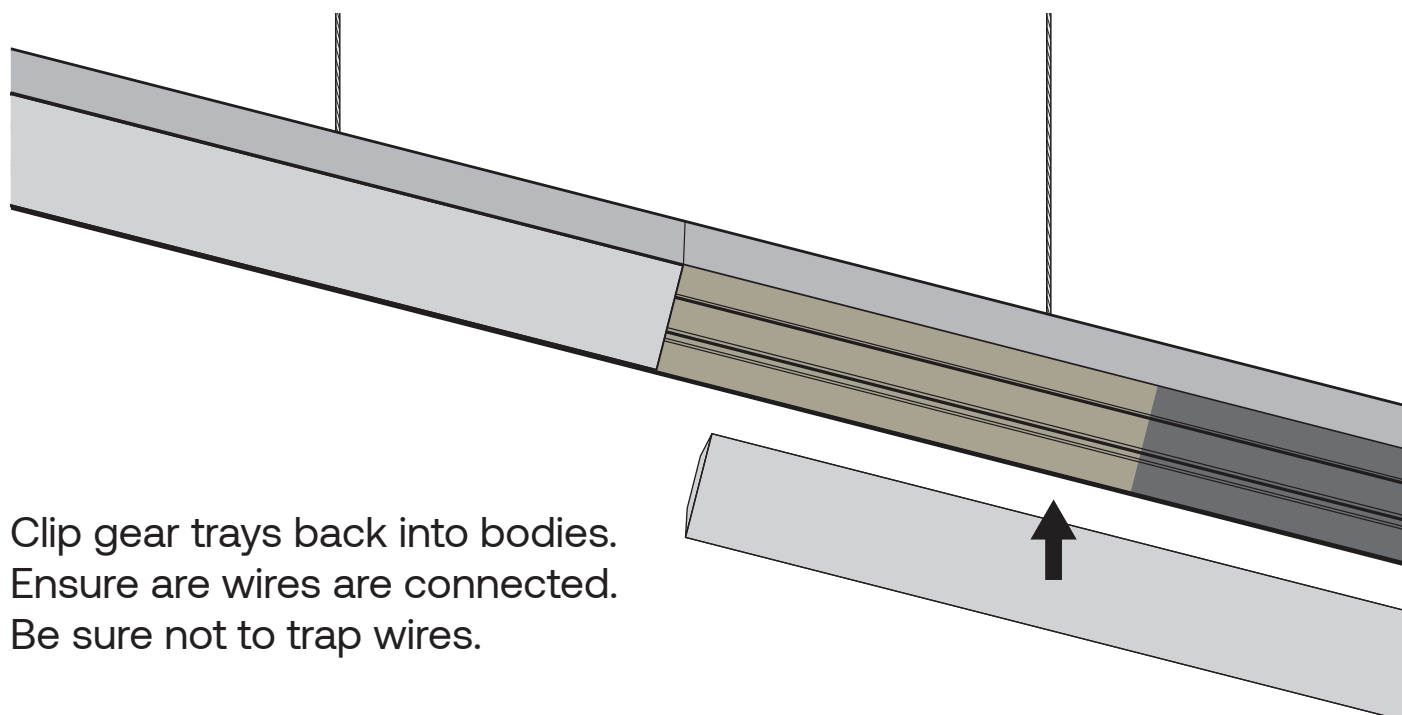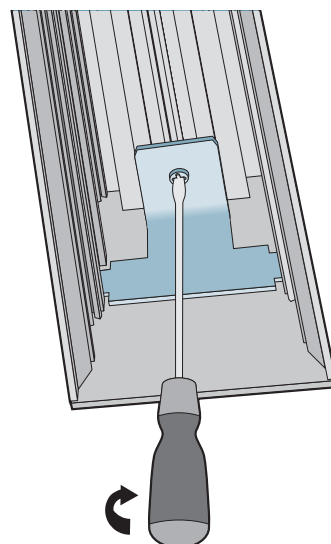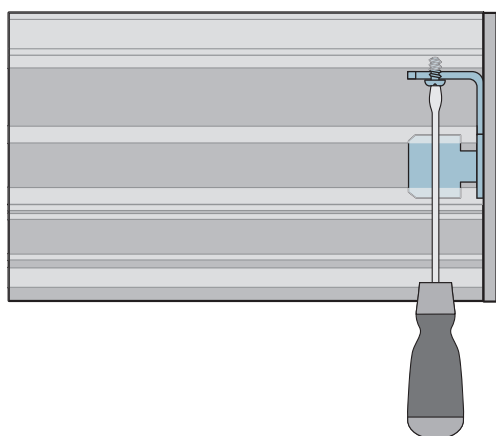

Clip gear trays back into bodies.  
Ensure all wires are connected.  
Be sure not to trap wires.