MILLIE Linear LED Luminaire

Installation instructions
RECESSED

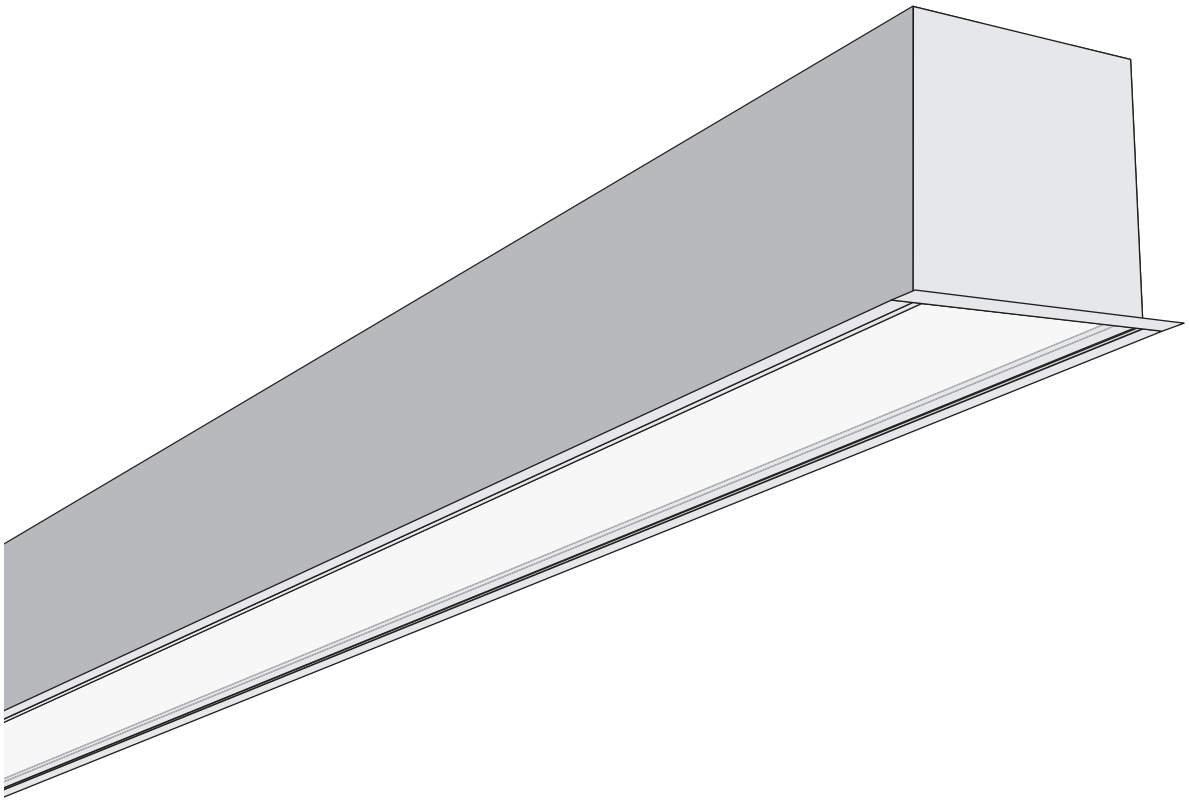

MIL/*/05/****	L= 570mm
MIL/*/08/****	L= 850mm
MIL/*/11/****	L= 1130mm
MIL/*/14/****	L= 1410mm
MIL/*/16/****	L= 1690mm
MIL/*/19/****	L= 1970mm
MIL/*/22/****	L= 2250mm

LDL lighting

RECESSED

Cut ceiling only when Millie luminaires are on site to double check sizes.

65mm x (millie length + 10mm)
ie. for 1690mm Millie cut hole 65mm x 1700mm

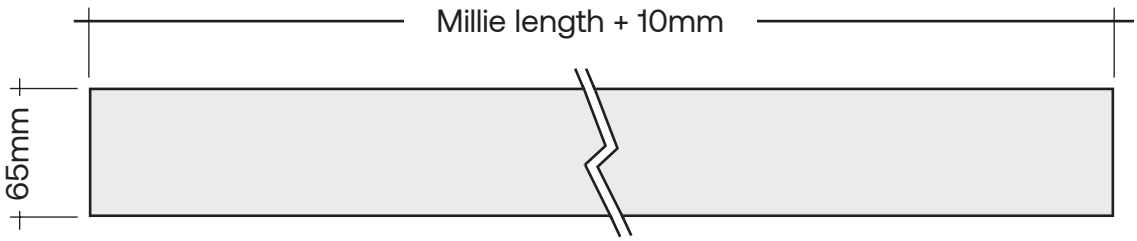

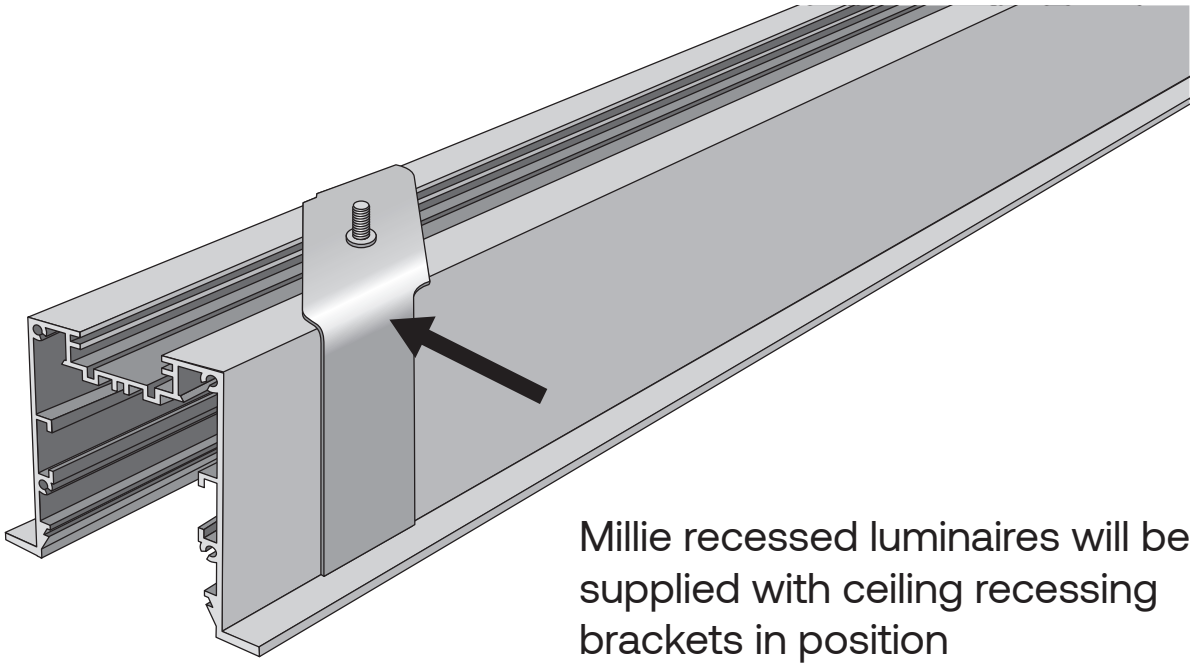

Millie recessed luminaires will be supplied with ceiling recessing brackets in position

Removing LED

Use plastic tool to remove the gear tray.

DO not touch the LED.

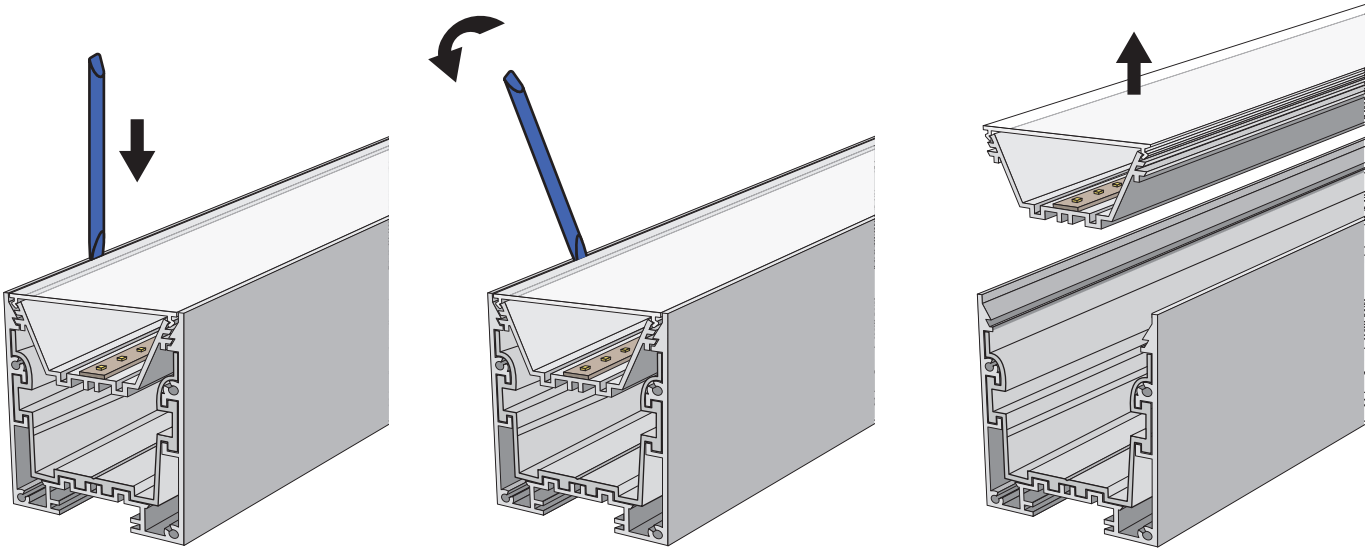

Connecting mutiple units

Mains must be powered off. Make hole in rear of extrusion as required for cable entry.

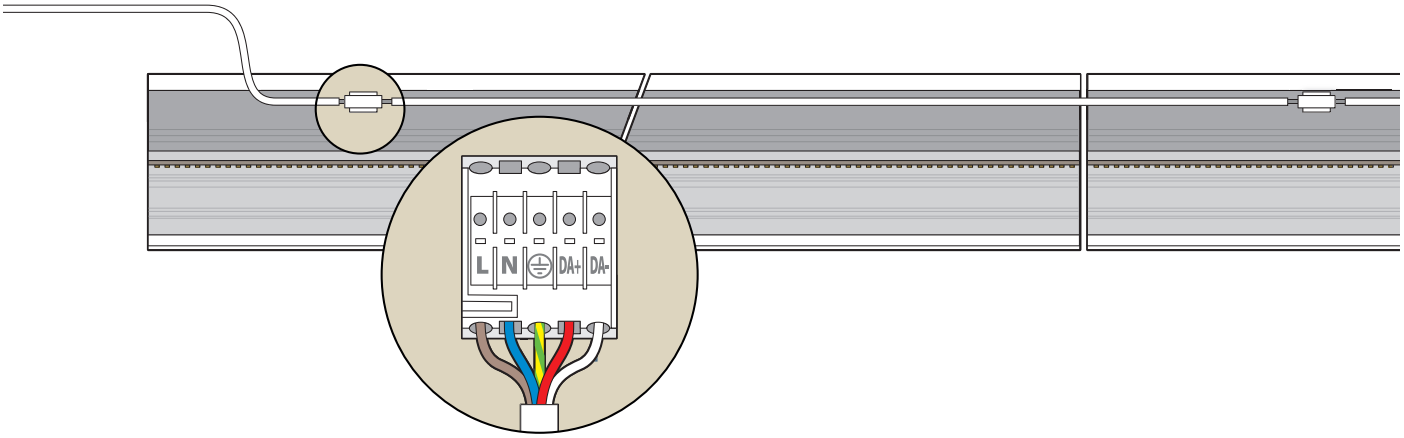

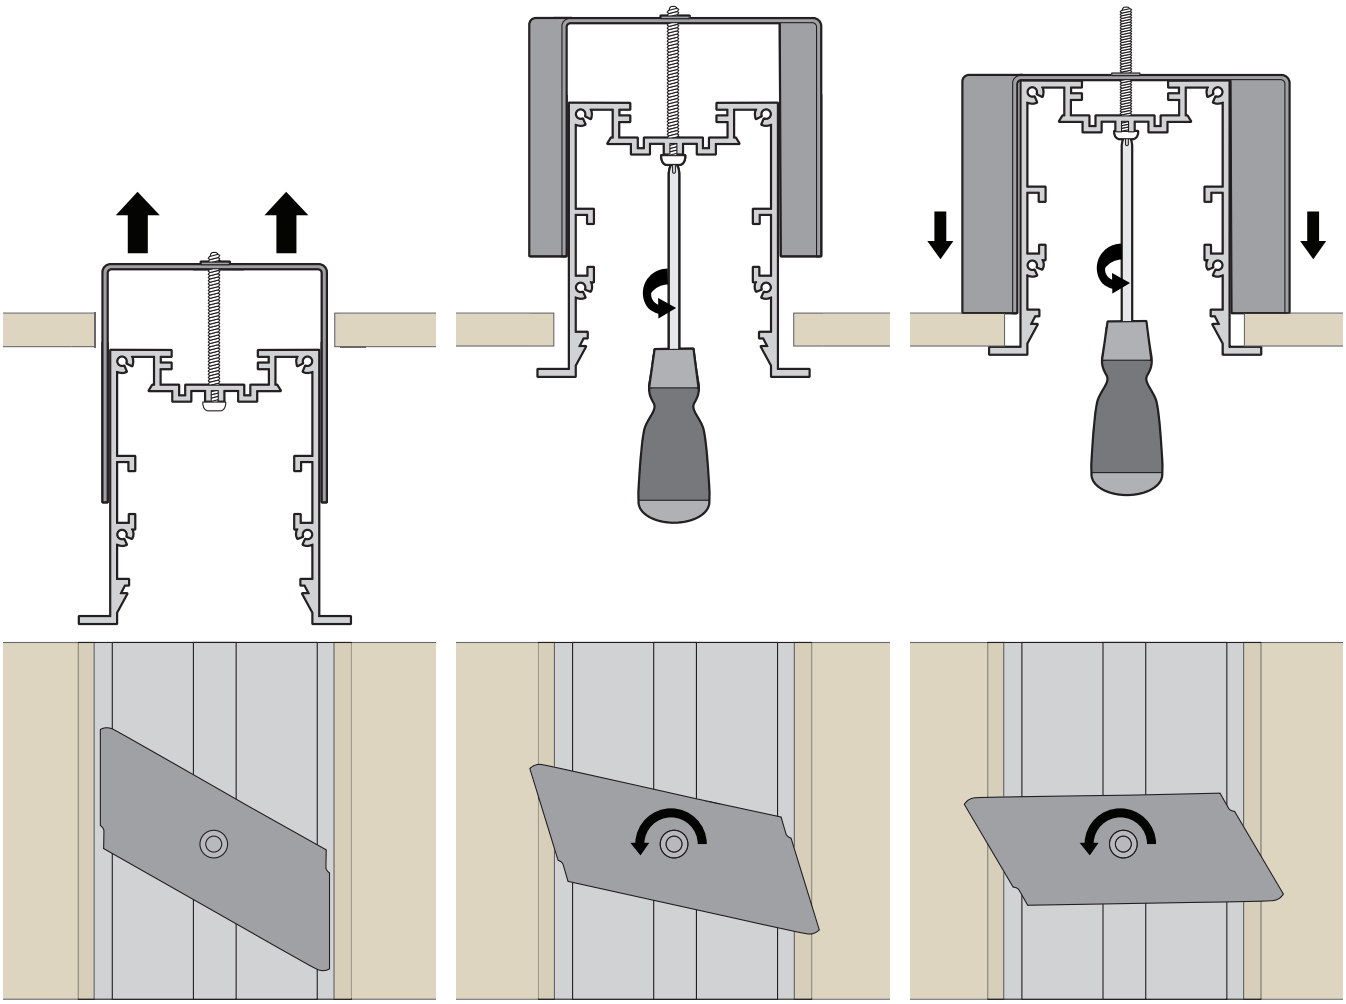

Insert Millie in to ceiling cut out with brackets tight against luminaire.

Using screwdriver, push screw up and begin to tighten screw.

The bracket will open up and begin to pull down on to the plasterboard.

Ensure luminaire is tight in the ceiling and not loose.

+44 (0) 1942 629179
www.ldl.lighting

Wiring Information

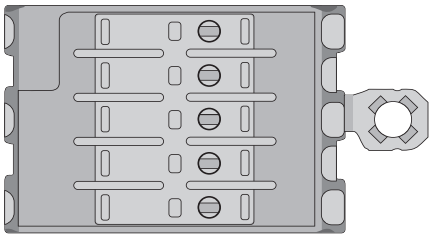

	Standard	Standard with Emergency
3	n/c	n/c
N	Neutral	Neutral
E	Earth	Earth
1	Live	Switched Live
2	n/c	Permanent Live

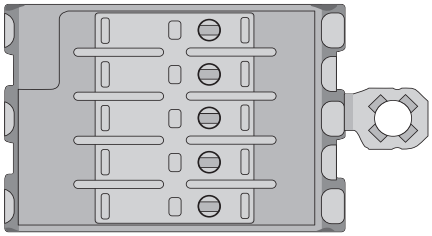

	Dali
L	Neutral
N	Earth
E	Live
DA+	Dali+
DA-	Dali-

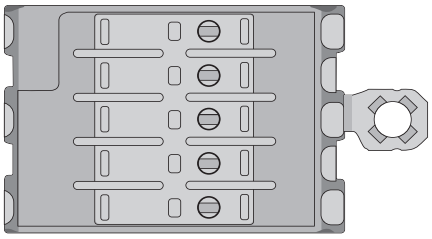

	Dali with Emergency
3	n/c
N	Neutral
E	Earth
1	Switched Live
2	Permanent Live



DA+	Dali+
DA-	Dali-

Connecting with coupler

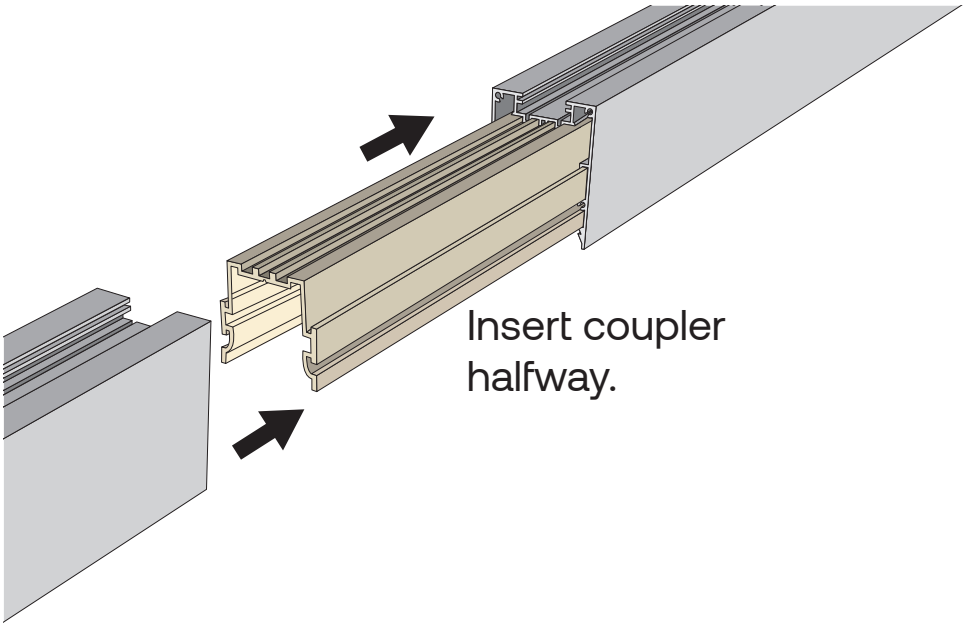

Insert coupler halfway.

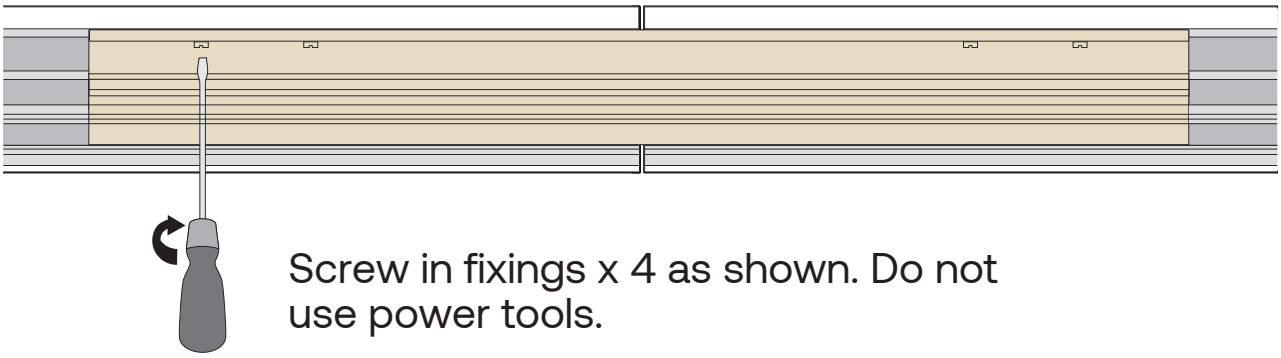

Screw in fixings x 4 as shown. Do not use power tools.

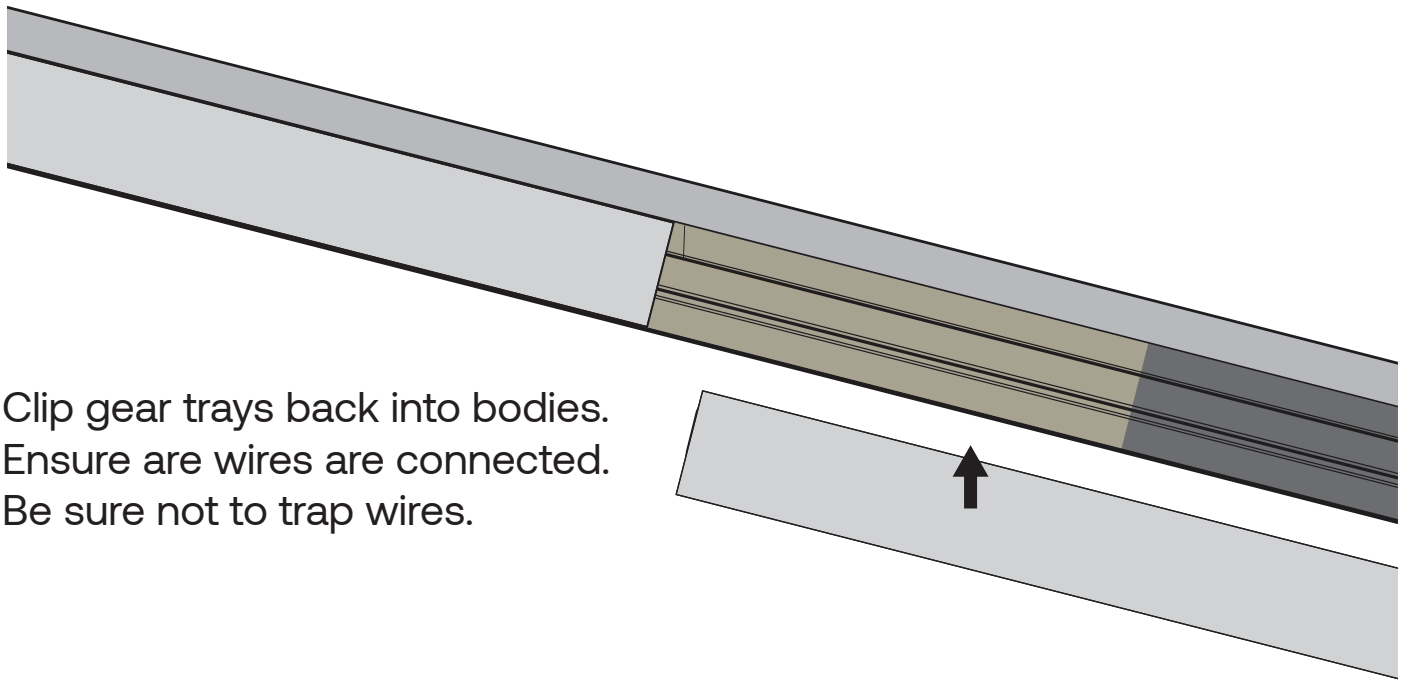

Clip gear trays back into bodies.
Ensure are wires are connected.
Be sure not to trap wires.