


# Lily 2

## Downlighter

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

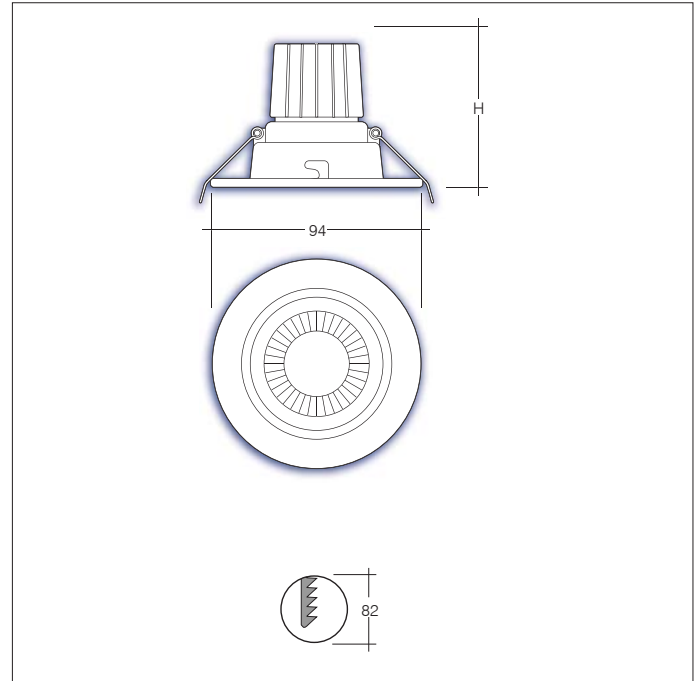

### Key features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 141lm/W
- Nominal life-time of 54,000 h (L70/B50)
- Colour stability with 3 step MacAdam
- Very high colour rendering index CRI > 90
- Emergency BLF = 352lm

### Options

- For White bezel option suffix: /WHI
- For Chrome bezel option suffix: /CH
- For Satin Silver bezel option suffix: /SS
- For 12° suffix: /12D
- For 24° suffix: /24D
- For 36° suffix: /36D
- For Dali dimmable option (DC only) suffix: /DIM
- For 3hr integral emergency: /EMR

i.e. LIL/2/DC10/4/WHI/36D/DIM =

Lily 2 Adjustable Downlight, 1130lm, 10w, 4000K, White, 36°, Dali Dimmable

Part No.	Watt	Lm	Lm/W	CCT	H (mm)
LIL/2/AC10/2	9	800	88	2700	80
LIL/2/AC10/3	9	830	92	3000	80
LIL/2/AC10/4	9	865	96	4000	80
LIL/2/DC10/2	8	1060	132	2700	65
LIL/2/DC10/3	8	1100	137	3000	65
LIL/2/DC10/4	8	1130	141	4000	65
LIL/2/DC12/2	12	1370	114	2700	75
LIL/2/DC12/3	12	1500	125	3000	75
LIL/2/DC12/4	12	1535	127	4000	75

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)