


Indoor Lighting

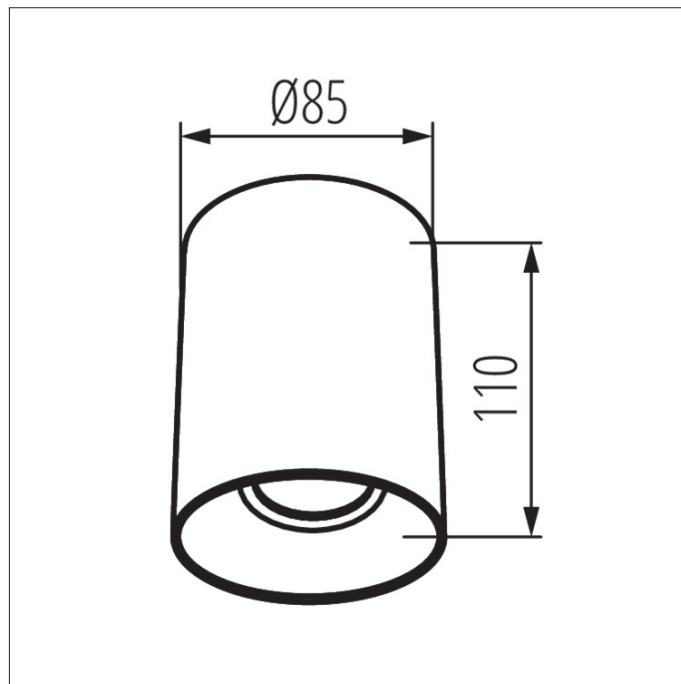

Key features

- IP20 suitable for internal environments
- Impact rating of IK 06
- Efficacy of up to 92lm/W
- Nominal life-time of 50,000 h (L70/B10)
- Colour stability with 3 step MacAdam
- Weight = 0.5kg

Options

- For 3000K CCT LED suffix: /3
- For 4000K CCT LED suffix: /4
- For circular housing suffix: /C
- For square housing suffix: /S
- For black paint finish suffix: /BLK
- For silver paint finish suffix: /SLV
- For white paint finish suffix: /WHI

i.e.: Lily surface downlight, 7W, 645lm, 4000K, circular housing, white finish = **LIL/S/600/4/C/WHI**

Part No.	Lm	W	Lm/W
LIL/S/600	645	7	92
LIL/S/800	829	10	83
LIL/S/1400	1440	18	80

For more information, please contact Sales@ldl.lighting

