


AMELIA LED System

Installation instructions




Joining of continuous Amelia system


Suspend the first piece of Amelia. Ensure all suspensions are fitted and are vertical within 5°. All luminaires must be suspended level.

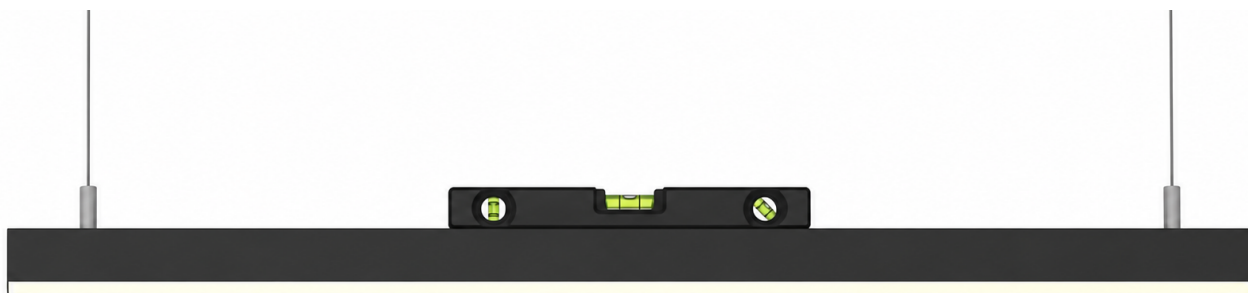


Unscrew the cover of suspended luminaire.

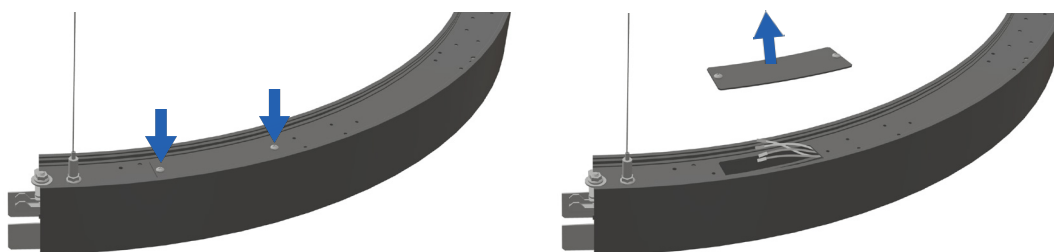

Ensure locking bolt is loose. Feed wires through past the coupling mechanism and ensure **no wires are trapped**. Then slot the next luminaire on to the joining plates and push the luminaires together.

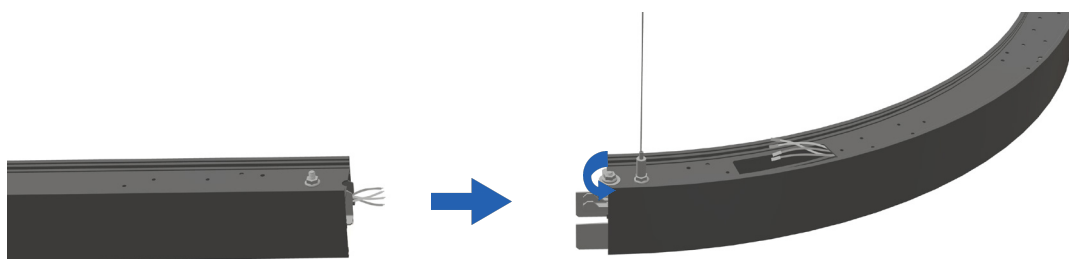


Tighten the locking bolt in between two luminaires to fix together.

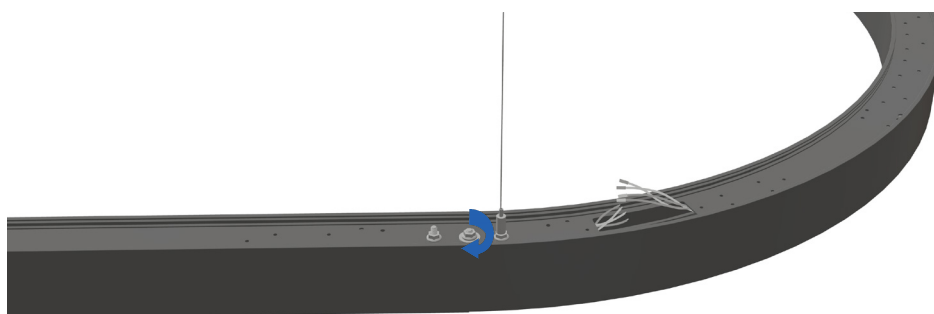


Suspension cable repositioning


Press the pin on the wire clutch to release the cable.

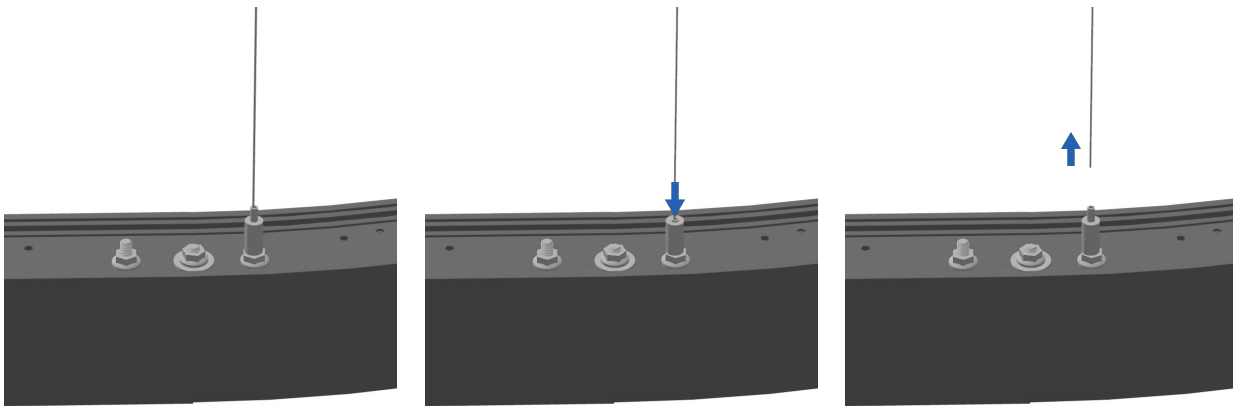

Unscrew the clutch and screw it back on the bolt in between two luminaires.

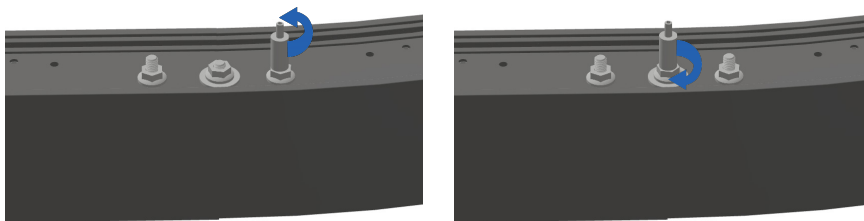


Insert the cable back in by pressing the pin on the gripper and feeding the cable through. Trim excess wire as required.

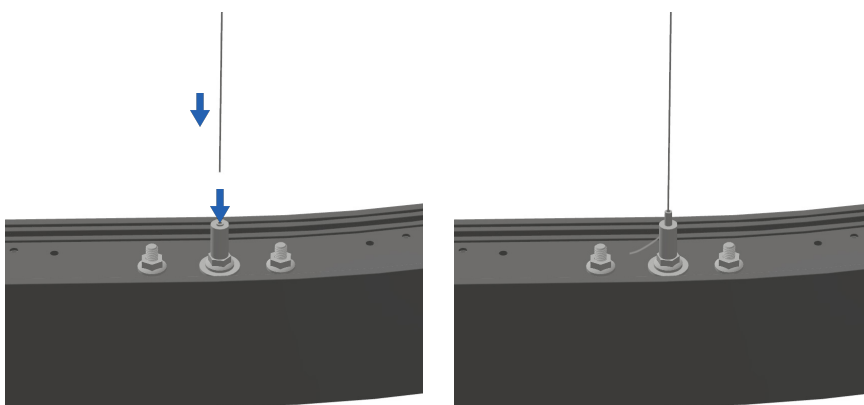


Connect the electrical wires


Pull through wires from linked luminaire and trim to suit. Connect with the provided Wago connectors.

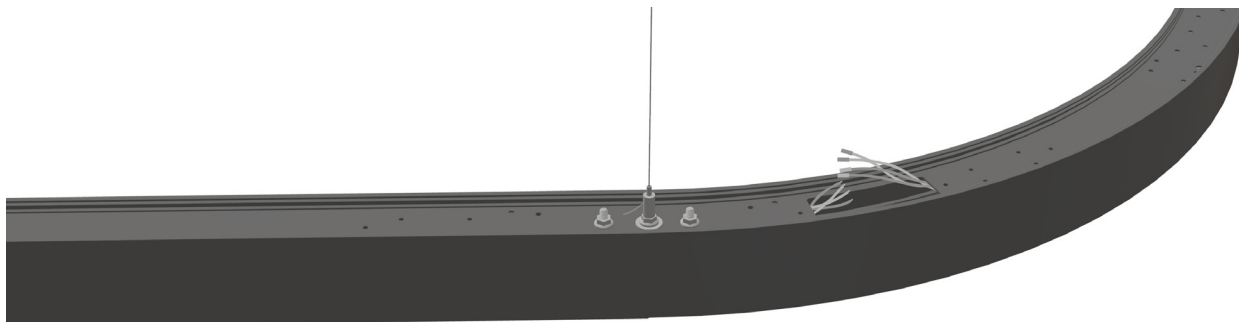

Wiring Colour Information

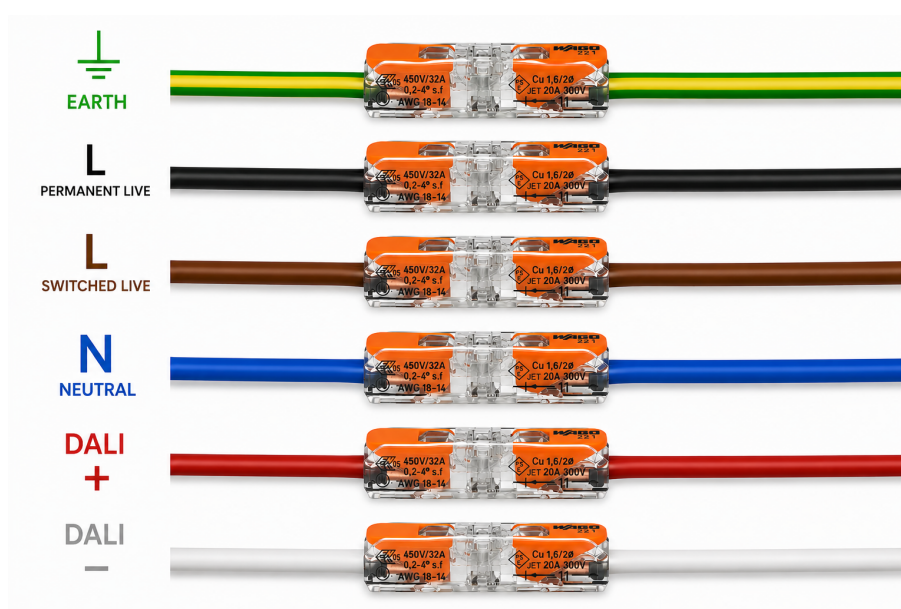

Push the electrical cables back into the luminaire and screw the cover plate back on.

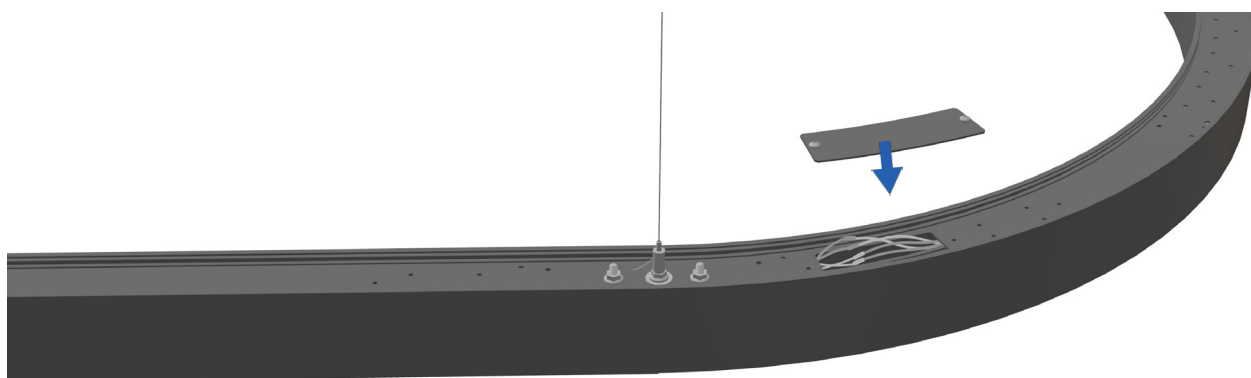

Cable entry installation

Choose one of the cover plates to replace with a cable entry plate. Connect the mains cable into the Wago Connectors provided and close the cover.

