


### Indoor Lighting

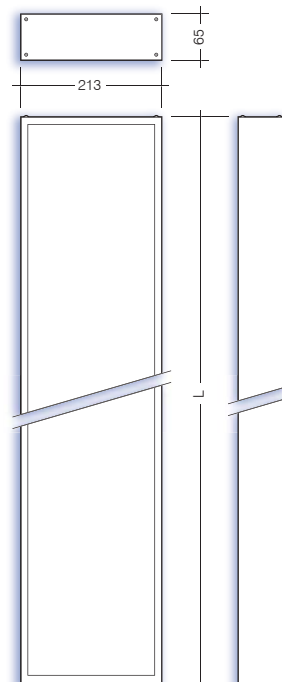

### Key Features

- IP40 suitable for indoor environments
- Impact rating of IK08
- Efficacy of up to 123lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 445 lm

### Options

- For Microprismatic /MP
- For Opal /OP
- For Surface/Suspended suffix /S
- For Recessed suffix /R
- For Black suffix /B
- For White suffix /W
- For DALI Dimable suffix /DIM
- For Self-Contained 3hr emergency suffix /EMR
- For 3hr Self-test emergency suffix /ST
- For DALI EM-PRO 3hr emergency suffix /EMP

i.e. **IM/14/5230/4/S/B/DIM/=**  
Imogen 1450mm, Surface Black Luminaire, 5233lm, 51w, 4k, DALI Dimmable c/w DALI EM-PRO 3hr emergency

### Accessories

- 2m Wire Suspension /IM/WSK

Part No.	W	L	Lm/W	L
IM/11/1560/4	16	1556	97	1170
IM/11/2320/4	24	2315	96	1170
IM/11/2940/4	32	2938	92	1170
IM/14/3100/4	25	3063	123	1450
IM/14/4400/4	37	4379	118	1450
IM/14/5600/4	50	5610	112	1450

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

