


# Noma

## Surface Mounted

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

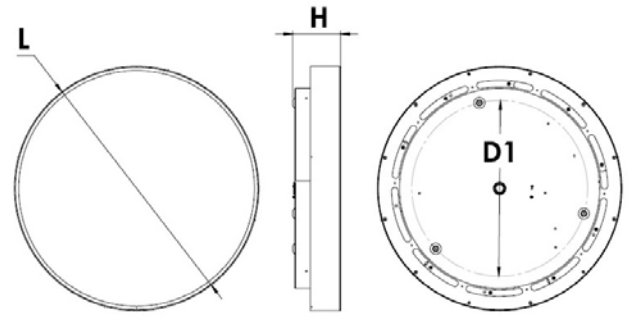

| L, mm | H, mm | D1, mm |
|-------|-------|--------|
| 450   | 89    | 324    |
| 600   | 89    | 474    |
| 900   | 89    | 774    |

### Key features

- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 158lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam

### Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For wireless dimmable suffix: /WD
- For 3 hr emergency suffix: /EMR
- For self-test suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless addressable emergency suffix: /WAE
- For wire suspension kit suffix: /SUS

i.e.: Noma Ø600mm, 53W, 7658lm, 3000K =

NOM/6/7660/3

| Part No.      | Lm    | W  | Lm/W | Weight | CCT   | L mm |
|---------------|-------|----|------|--------|-------|------|
| NOM/4/3650/3  | 3652  | 26 | 141  | 4.7kg  | 3000K | 450  |
| NOM/4/3820/4  | 3824  | 26 | 151  | 4.7kg  | 4000K | 450  |
| NOM/4/5100/3  | 5095  | 36 | 142  | 4.7kg  | 3000K | 450  |
| NOM/4/5330/4  | 5334  | 36 | 152  | 4.7kg  | 4000K | 450  |
| NOM/6/5480/3  | 5480  | 38 | 145  | 7.9kg  | 3000K | 600  |
| NOM/6/5740/4  | 5737  | 38 | 155  | 7.9kg  | 4000K | 600  |
| NOM/6/7660/3  | 7658  | 53 | 146  | 7.9kg  | 3000K | 600  |
| NOM/6/8020/4  | 8017  | 53 | 156  | 7.9kg  | 4000K | 600  |
| NOM/9/8740/3  | 8741  | 59 | 147  | 13.8kg | 3000K | 900  |
| NOM/9/9150/4  | 9152  | 59 | 158  | 13.8kg | 4000K | 900  |
| NOM/9/11690/3 | 11688 | 80 | 147  | 13.8kg | 3000K | 900  |
| NOM/9/12240/4 | 12237 | 80 | 157  | 13.8kg | 4000K | 900  |

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

