



Indoor Lighting

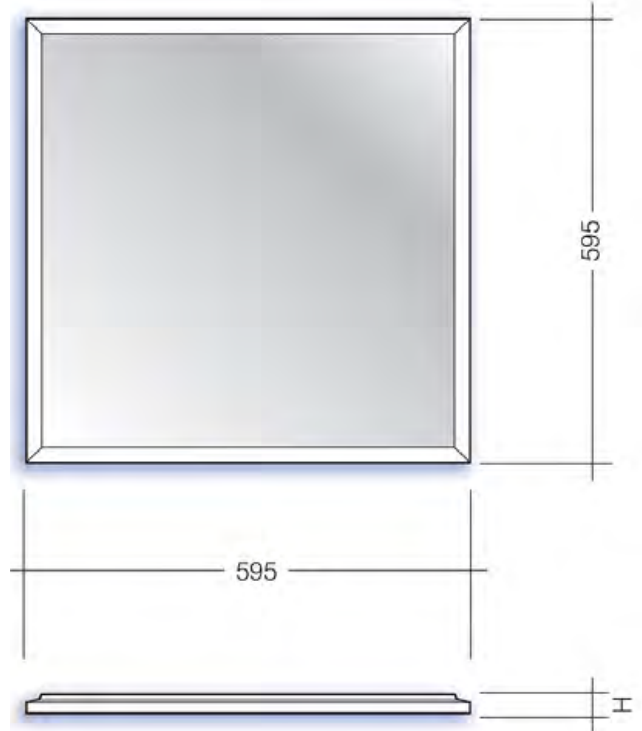

Key features

- TP(a) rated
- IP20 as standard, IP65 also available
- Impact rating of IK04
- Efficacy of up to 134lm/W
- Nominal life-time of 50,000 h (L90/B10)
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- Emergency BLF = 330 lm
- LG7 compliant
- UGR < 19
- 1200 x 300 & 1200 x 600 also available

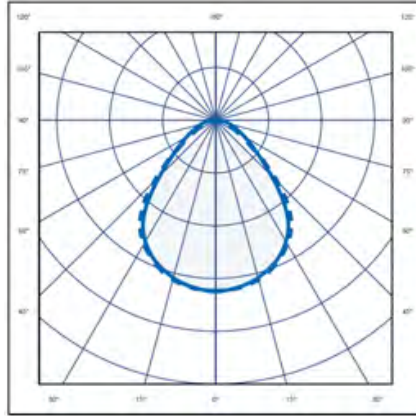

Options

- For surface option suffix (recessed is standard) /SF
- For DALI dimmable suffix /DIM
- For Casambi enabled suffix /CAS
- For 3hr emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr DALI emergency suffix /EMP
- For wireless addressable emergency suffix /WAE

i.e.: Louis 600mm x 600mm Premium Panel, 30w, 3868 lumens,
4000K, DALI dimmable c/w self-test emergency =
LOU/66/3800/4/TPA/DIM/ST

Part No.	W	Lm	Lm/W	H
LOU/66/2800/4/TPA	21	2806	133	8
LOU/66/3300/4/TPA	26	3325	130	8
LOU/66/3800/4/TPA	30	3868	127	8
LOU/66/4400/4/TPA	35	4395	126	8
LOU/66/4700/4/TPA	40	4724	119	8

For more information, please contact Sales@ldl.lighting