



Polo

Suspended

Innovation.
Collaboration.
Illumination.



Indoor Lighting

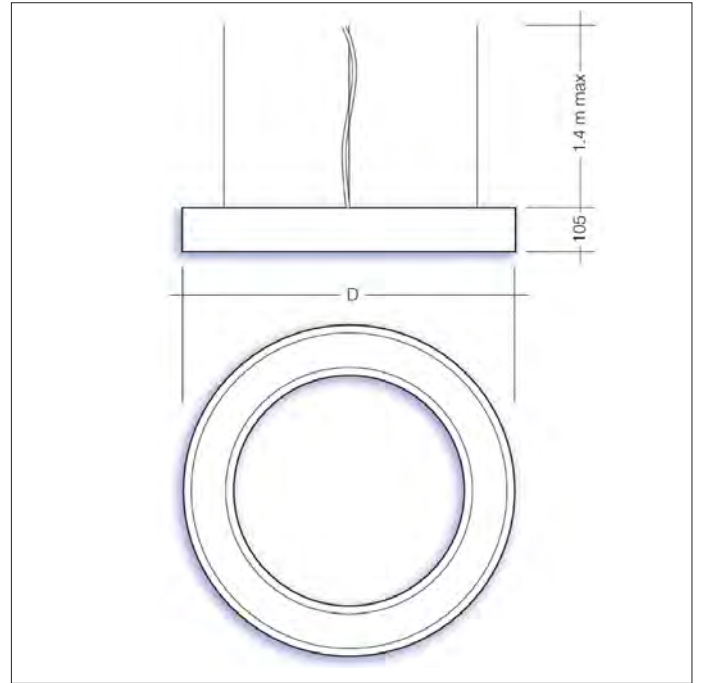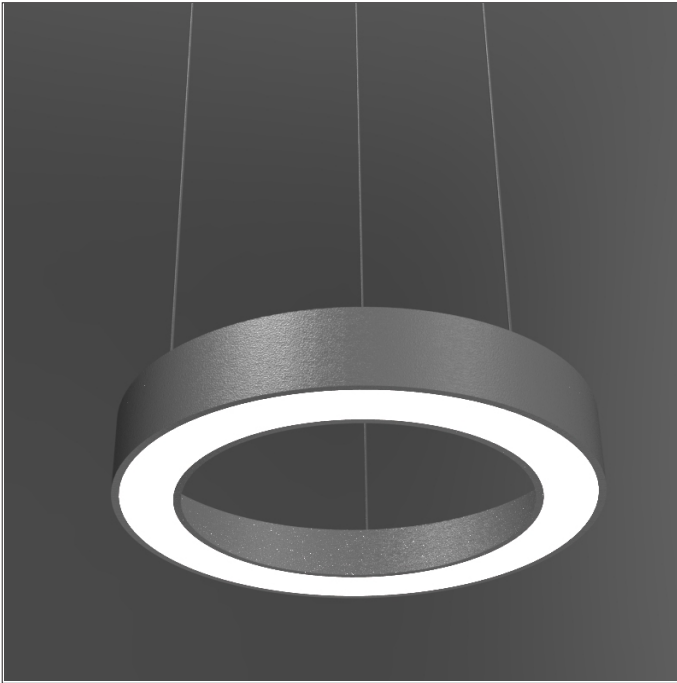


Key Features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 50lm/W
- Nominal life-time of 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80

Options

- For DALI dimmable (600mm only) suffix **/DIM**

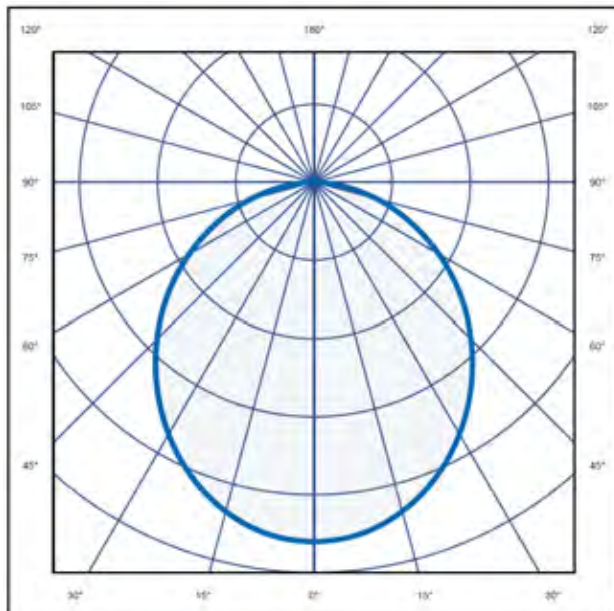

Part No.	Lm	W	Lm/W	D(mm)
POLO/6/2600/84	2625	53	50	ø600
POLO/12/5000/84	5025	106	47	ø1200

For more information, please contact Sales@ldl.lighting