


Indoor Lighting

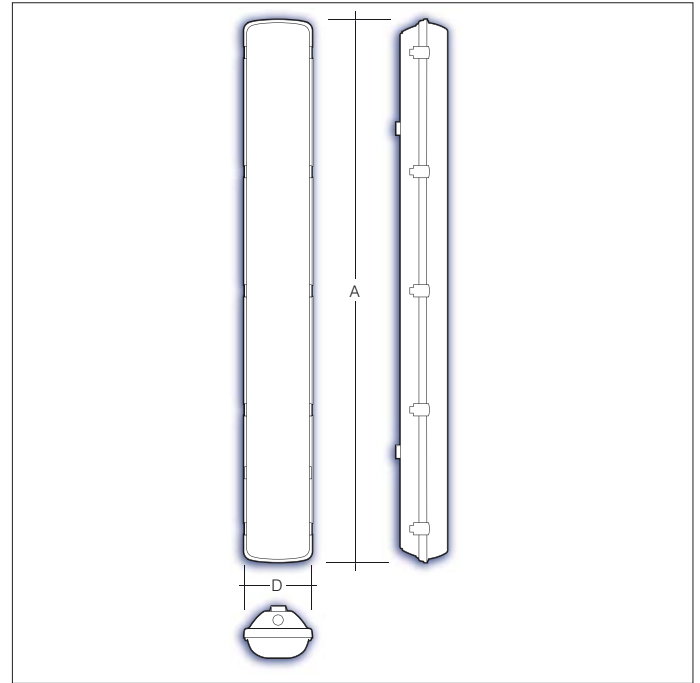

Features

- IP65 Certified to European Community Directive No.2014/34/EU and ATEX approved
- Maximum ambient temperature $t_a=40^{\circ}\text{C}$
- Minimum ambient temperature -20°C
- 50,000 hour life span /L80B20
- Standard Cri80 4000K (other options available on request)

Options

- For 3hr self-contained emergency suffix **/EMR**
- For self-test emergency suffix **/ST**
- For Dali emergency suffix **/EMP**

i.e. **PRI/5/4790/EMR PRIMEX LED =**
ZONE II, 1500mm, 4790lm, 4K c/w 3hr emergency

Key Features

- IP65
- Impact rating of IK10
- Efficacy of up to 118lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 334 lm

Part No.	W	Lm	Lm/W	Weight	A(mm)	D(mm)	H(mm)
PRI/2770/4	24	2770	115	3.2	1272	145	111
PRI/3730/4	31	3730	120	3.3	1272	145	111
PRI/5200/4	43	5200	121	3.4	1272	145	111
PRI/7260/4	60	7260	121	3.5	1272	145	111
PRI/3430/5	30	3430	114	4.1	1572	145	111
PRI/4790/5	40	4790	120	4.2	1572	145	111
PRI/6490/5	54	6490	120	4.3	1572	145	111
PRI/8710/5	73	8710	119	4.4	1572	145	111

For more information, please contact Sales@ldl.lighting

