


Garth

Anti-Ligature Recessed

Innovation.
Collaboration.
Illumination.



Indoor Lighting

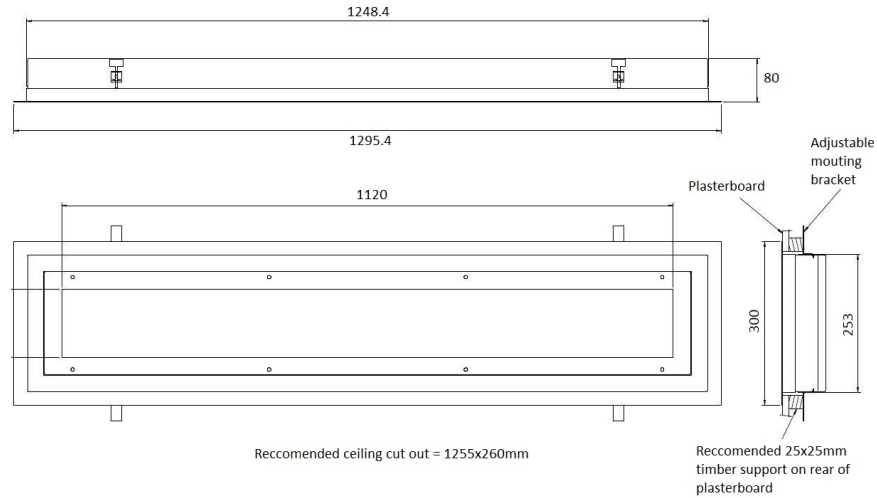

Key Features

- IP65 suitable for indoor environments
- Impact rating of IK10
- Efficacy of up to 123lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- 5mm TP(a) diffuser
- 1.5mm steel powder coated

Options

- For Microprismatic /MP
- For Opal /OP
- For Surface/Suspended suffix /S
- For Recessed suffix /R
- For Black suffix /B
- For White suffix /W
- For DALI Dimable suffix /DIM
- For Self-Contained 3hr emergency suffix /EMR
- For 3hr Self-test emergency suffix /ST
- For DALI EM-PRO 3hr emergency suffix /EMP

Part No.	Lm	Watt	Lm/W
GAR/12/3480/4	3480	21	165
GAR/12/5800/4	5800	35	165
GAR/12/8080/4	8080	51	158
GAR/15/4350/4	4350	25	174
GAR/15/7250/4	7250	44	164
GAR/15/10100/4	10100	63	160

For more information, please contact Sales@ldl.lighting

