


External Lighting

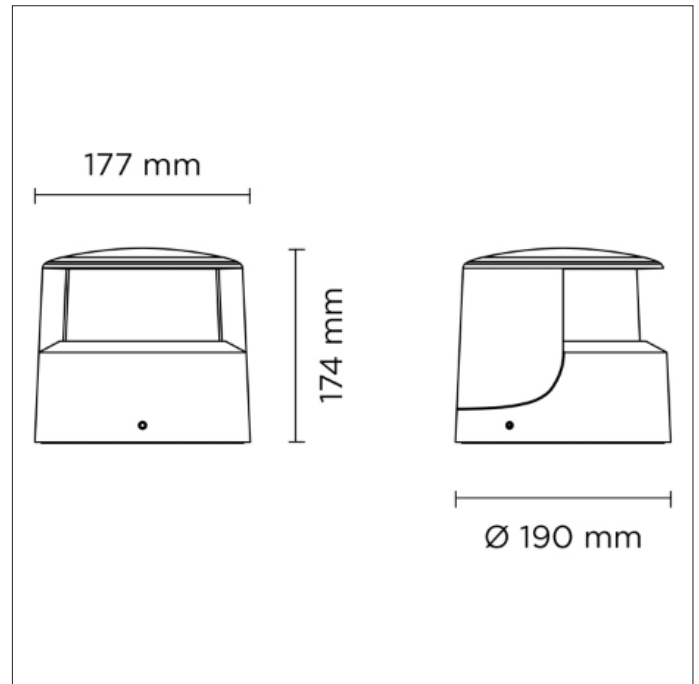

Key Features

- IP66 suitable for external environments
- Impact rating of IK10
- Beam angle : Symmetric, omni-directional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam

Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **RA/180/1150/4/BLK=**
Ra, 180°, 1150lm, 4k, Black.


Accessories

- Root Attachment **/TRON/ROOT**

Part No.	W	Lm	CCT	CRI	Weight
RA/180/1150/4	26	1150	4000k	80	4.0kg
RA/360/2100/4	26	2100	4000k	80	4.0kg

For more information, please contact Sales@ldl.lighting

180°

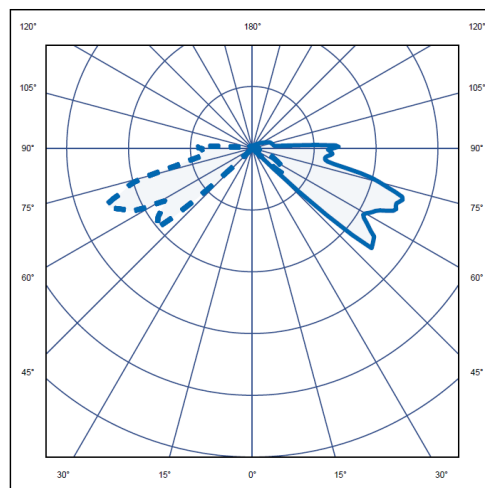

360°

