


TS Pro IP

LED High Output Twinspot

Innovation.
Collaboration.
Illumination.



Emergency

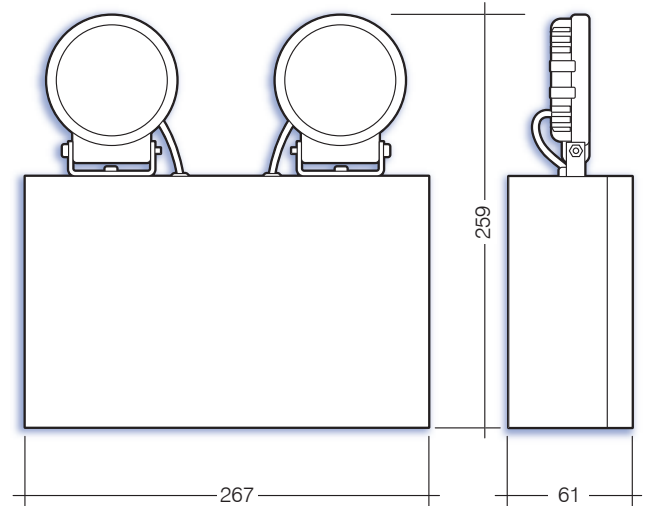

Key Features

- Directable lampheads with integrated ratchet system
- 3 Hour emergency output
- Multiple mounting orientations
- IP65 suitable for external environments
- High LED output heads
- Integral status indicator
- DALI, selftest and Standard technology options available
- Easy installation with push terminals
- Protection Class II
- Ambient temperature (ta) - 0°C to +45°C

Part No.	Lm	W	Lm/W	CCT
TS/PRO/768	768	7	110	5000K
TS/PRO/1105	1105	9	122	5000K
TS/PRO/2062	2062	14	147	5000K

For more information, please contact Sales@ldl.lighting

