


Indoor Lighting

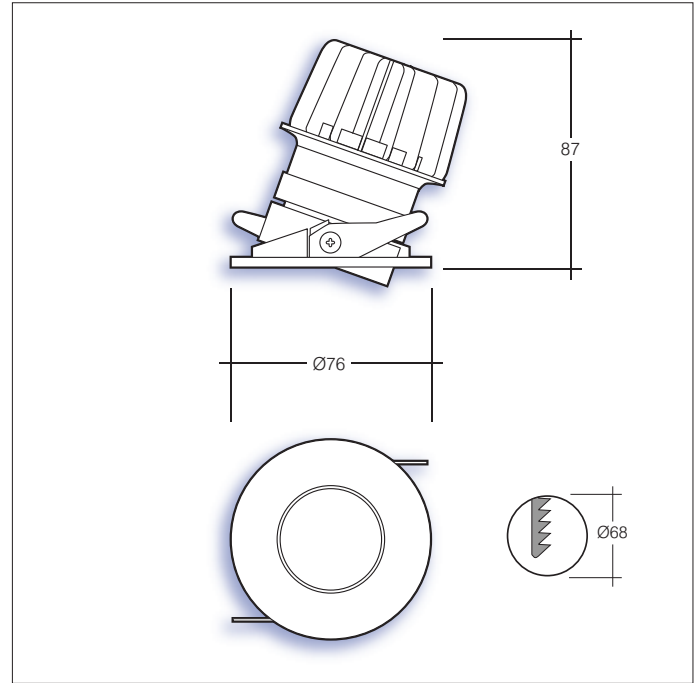

Key features

- IP20/IP44
- Impact rating of IK02
- Efficacy of up to 94lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- UGR < 19 with baffle fitted
- Emergency BLF = 235 lm

Options

- For DALI dimmable suffix: **/DIM**
- For Casambi enabled suffix: **/CAS**
- For leading/trailing edge dimmable suffix: **/MDIM**
- For IP44 freznel lens suffix: **/IP44**
- For 3hr emergency suffix: **/EMR**
- For self-test emergency suffix: **/ST**
- For DALI addressable emergency suffix: **/EMP**

i.e.: Darcey 800lm, 9W, 4000K, DALI dimmable, 3hr emergency =

DAR/800/4/DIM/EMR

CRI 80 as standard, CRI 90 available on request.

White finish as standard , other finishes available on request.

Part No.	Lm	W	Lm/W	Weight	CCT
DAR/740/3	739	9	86	0.3kg	3000K
DAR/800/4	800	9	94	0.3kg	4000K
DAR/980/3	976	13	76	0.3kg	3000K
DAR/1150/4	1147	13	91	0.3kg	4000K
DAR/1260/3	1263	17	74	0.3kg	3000K
DAR/1480/4	1480	17	88	0.3kg	4000K

For more information, please contact Sales@ldl.lighting

