
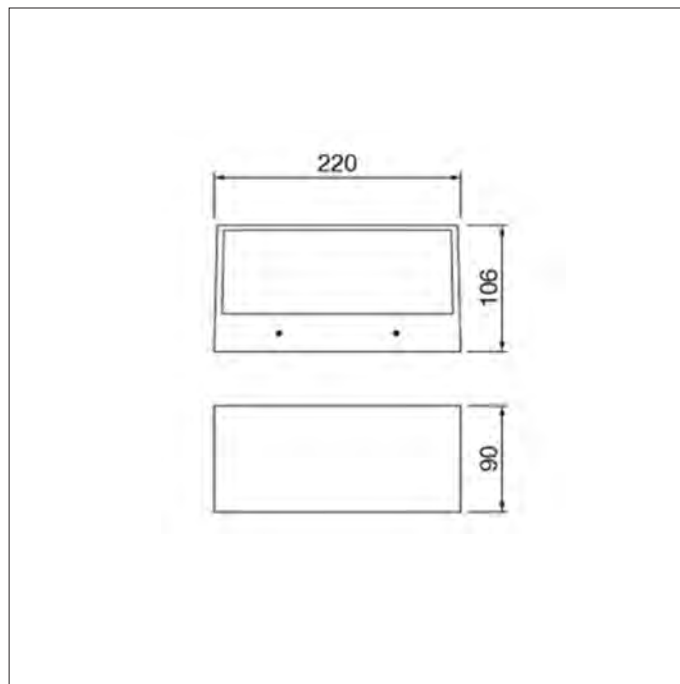


### Outdoor Lighting

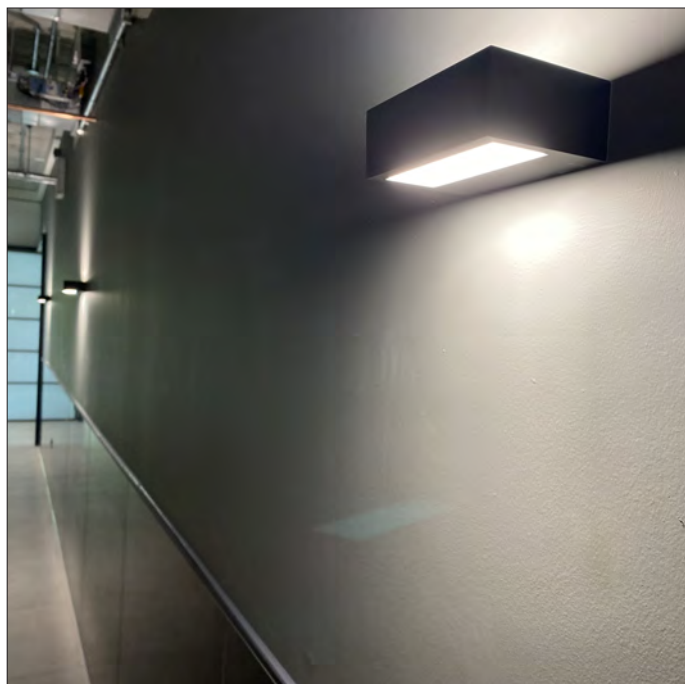

### Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For wireless dimmable system suffix: /WD
- For 3 hr integral emergency suffix: /EMR
- For self-test suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless addressable emergency suffix: /WAE

i.e.: Ava wall light, 18W, 1452lm, 4000K, = **AVA/1400/4**

CRI 80 as standard, CRI 90 available on request.

### Key features

- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 83m/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam

Part No.	Lm	W	Lm/W	Weight	CCT
AVA/1000/3	934	12	78	1.6kg	3000K
AVA/1000/4	994	12	83	1.6kg	4000K
AVA/1400/3	1364	18	75	1.6kg	3000K
AVA/1400/4	1452	18	80	1.6kg	4000K
AVA/1800/3	1716	24	72	1.6kg	3000K
AVA/1800/4	1826	24	77	1.6kg	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

