


### Industrial Lighting

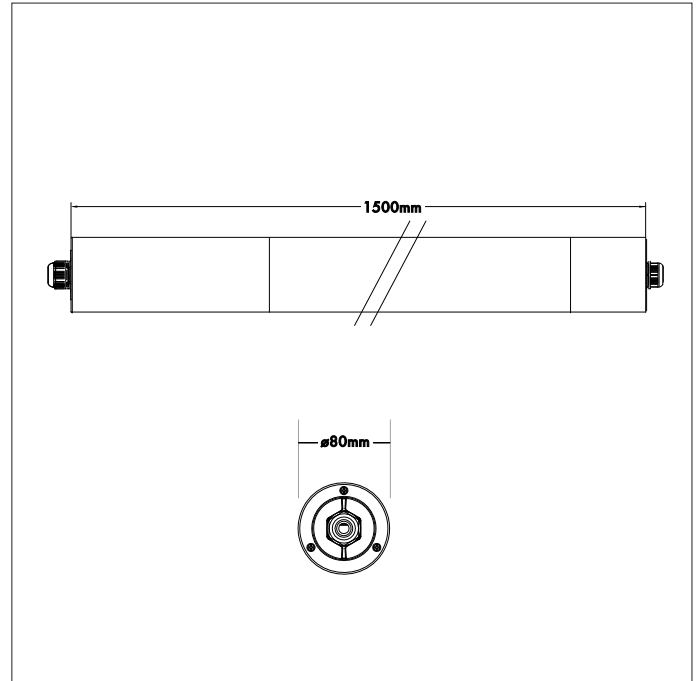

### Key Features

- IP69K suitable for harsh industrial environments
- Impact rating of IK10
- Efficacy of up to 154lm/W
- Nominal life-time of >72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Through wired with cable entry both ends
- Fully adjustable fixing brackets
- Surface mounted or suspended

### Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For wireless dimmable system suffix: /WD
- For 3 hr integral emergency suffix: /EMR
- For self-test suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless addressable emergency suffix: /WAE
- i.e.: Keela 1500mm, 11978 lumens, 86W, 4000K, DALI dimmable = **KEE/5/12000/4**

CRI 80 as standard, CRI 90 available on request.

Part No.	Lm	W	Lm/W	Weight	CCT
KEE/5/5000/4	5228	34	154	2.3kg	4000K
KEE/5/7000/4	7047	46	153	2.3kg	4000K
KEE/5/10000/4	10023	71	141	2.3kg	4000K
KEE/5/12000/4	11978	86	139	2.6kg	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

