


Indoor Lighting

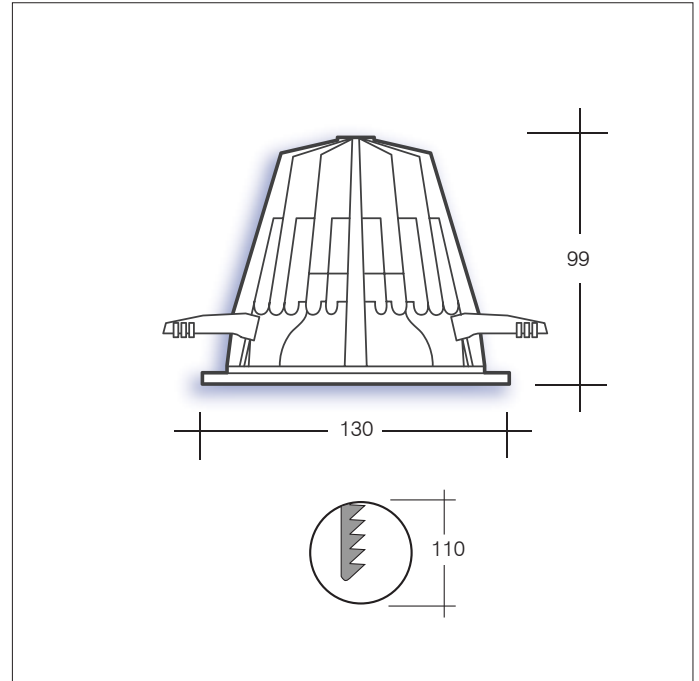

### Key features

- IP20/IP54/IP65
- Impact rating of IK05
- Efficacy of up to 132lm/W
- Nominal life-time of >55,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 314 lm

### Options

- For DALI dimmable suffix: **/DIM**
- For Casambi enabled suffix: **/CAS**
- For leading/trailing edge dimmable suffix: **/MDIM**
- For 3hr emergency suffix: **/EMR**
- For self-test emergency suffix: **/ST**
- For DALI addressable emergency suffix: **/EMP**

i.e.: Juna 1725lm, 14W, 3000K, DALI dimmable, 3hr emergency, white bezel  
= **JUN/1720/3/DIM/EMR/WHI**



CRI 80 as standard, CRI 90 available on request.

White finish as standard, other finishes available on request.

Part No.	Lm	W	Lm/W	CCT
JUN/1020/3	1020	8	128	3000K
JUN/1050/4	1055	8	132	4000K
JUN/1720/3	1725	14	125	3000K
JUN/1790/4	1787	14	129	4000K
JUN/2360/3	2363	19	123	3000K
JUN/2440/4	2442	19	127	4000K
JUN/3150/3	3146	28	113	3000K
JUN/3250/4	3252	28	117	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

### Accessories

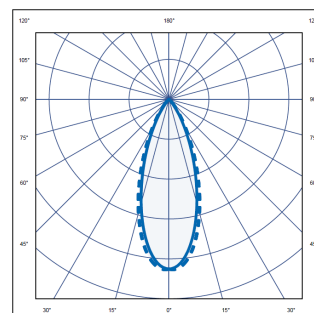

Indoor Lighting

Clear drop glass /DG1



Frost outer drop glass /DG2



Frost centre drop glass /DG3



Frost drop glass /DG4



Clear halo drop glass /DG5



Frost halo drop glass /DG6



Frost drop ring /DG7



Blue drop ring /DG8



Black drop ring /DG9



Mesh trim fitted /MT



Indoor Lighting

IP54 clear glass

/SG1



IP54 centre frost glass

/SG2



IP54 frost glass

/SG3



IP54 clear polycarbonate

/SG4



IP54 opal polycarbonate

/SG5



IP44 prismatic lens

/SG6



Universal bezel -

for use with IP65 glasses

/UB



IP65 clear glass

/SG7



IP65 clear polycarbonate

/SG8



IP65 opal polycarbonate

/SG9



Frost Hi-Light

/HL1



Blue Hi-Light

/HL2



White Anti-Tamper Bezel

/ATWH

