



Slot

Recessed Modular

Innovation.
Collaboration.
Illumination.



Indoor Lighting

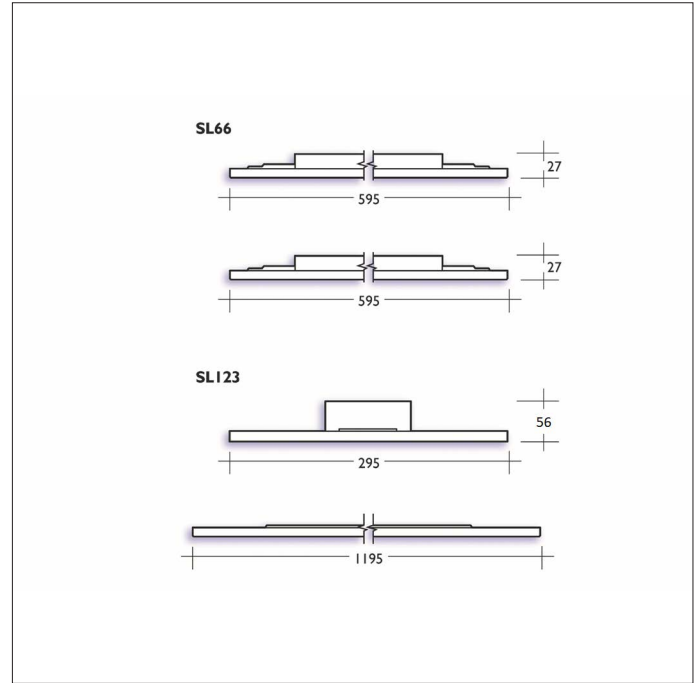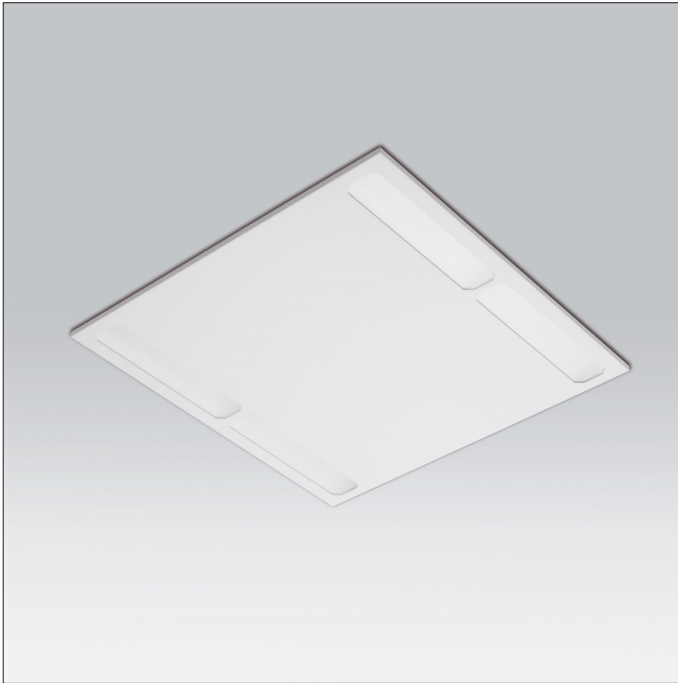

Key features

- IP40 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 126lm/W
- Nominal life-time of 72,000 h (L80/B10)
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- Emergency BLF = 342lm

Options

- For surface option suffix (recessed is standard) /SF
- For dimmable suffix /DIM
- For 3hr emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr DALI emergency suffix /EMP

i.e. **SL123/4738/4/DIM/EMP** =
Slot 1200x300, 4738 lumen, 4000k, dimmable c/w 3hr
Dali emergency

Part No.	W	Lm	Weight	lm/W
SL66/2896/4	24	2896	3.9kg	120
SL66/3485/4	29	3485	3.9kg	120
SL66/4068/4	34	4068	3.9kg	119
SL66/4590/4	39	4590	3.9kg	117
SL66/5134/4	44	5134	3.9kg	115
SL123/3563/3	28	3563	4.1kg	126
SL123/4738/4	38	4738	4.1kg	124
SL123/5829/3	48	5829	4.1kg	121
SL123/6946/4	58	6946	4.1kg	119

For more information, please contact Sales@ldl.lighting

