


Indoor Lighting

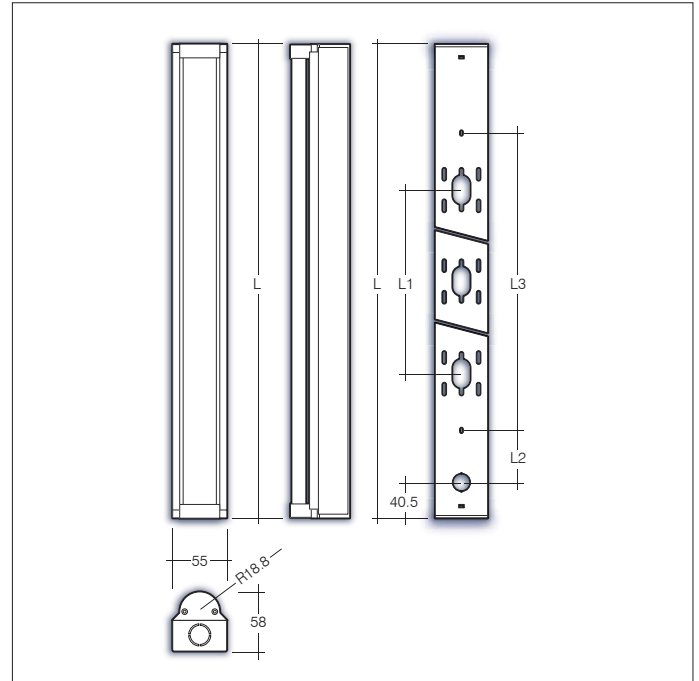

Key Features

- IP40 suitable for indoor environments
- Impact rating of IK06
- Efficacy of up to 132lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 315 lm

Options

- 4000K as standard for 3000K suffix /3
- For DALI dimmable suffix /DIM
- For 3hr self-contained emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr self-contained DALI emergency suffix /EMP

i.e. **BAN/5/3650/84/DIM/EMR =**

Banda 5ft batten, 3650 lumens, 4000K, Dali dimmable c/w 3hr self-contained emergency

Part No.	W	Lm	Lm/W	CCT	Weight
BAN/4/2300/84	19	2300	121	4000	1kg
BAN/4/2700/84	24	2709	113	4000	2kg
BAN/4/3120/84	28	3119	112	4000	2kg
BAN/5/3100/84	23	3107	132	4000	1.5kg
BAN/5/4160/84	33	4159	125	4000	1.5kg
BAN/5/5680/84	50	5677	113	4000	1.5kg

For more information, please contact Sales@ldl.lighting

Fixings (mm)	L	L1	L2	L3
1200mm	1200	610	800	159.5
1500mm	1500	610	840	289.5

