


Surface Mounted

Innovation. Collaboration. Illumination.



Outdoor Lighting



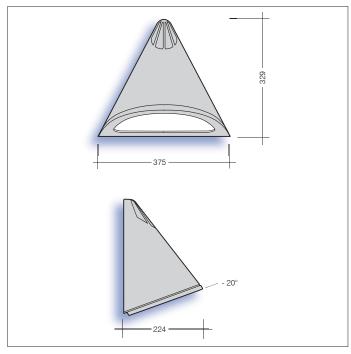

Light Source CCT Part No. W DA/1120/4 LED 4000k

Key features

- IP65 suitable for external environments
- Impact rating of IKO7
- Nominal life-time of 100,000 h (L70/B20)
- Emergency BLF = 155lm
- Weight = 3.1kg

Options

DANA/1120/84/GRA/EMR =		
•	For self-contained 3hr DALI addressable emergency suffix	/EMP
•	For 3hr self-test emergency suffix	/ST
•	For self-contained 3hr emergency suffix	/EMR
•	For graphite suffix	/GRA
•	For sandblasted silver suffix	/SLV

NA/1120/84/GRA/

Dana, LED, 4000K, Grahite c/w 3hr emergency.

For more information, please contact Sales@ldl.lighting

