
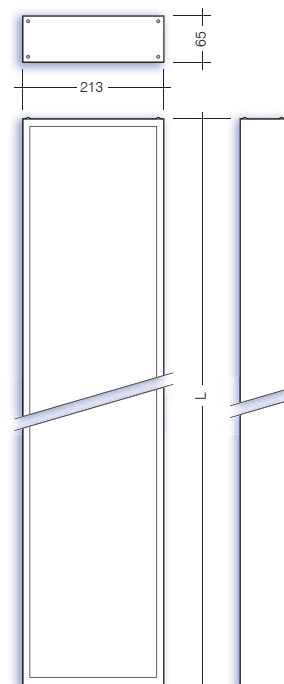


Indoor Lighting

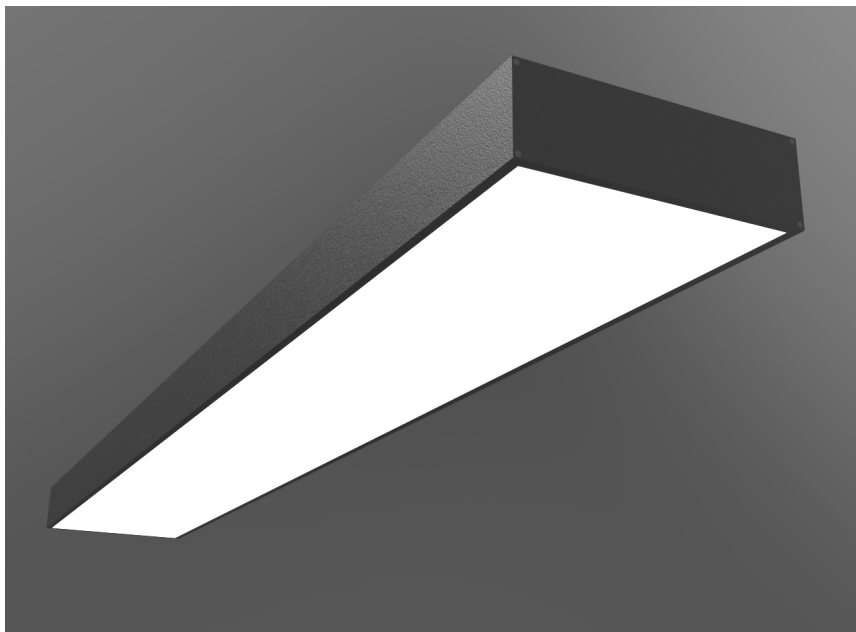

### Key Features

- IP40 suitable for indoor environments
- Impact rating of IK08
- Efficacy of up to 141lm/W
- Nominal life-time of > 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 445 lm

### Options

- For Microprismatic /MP
- For Opal /OP
- For Surface/Suspended suffix /S
- For Recessed suffix /R
- For Black suffix /B
- For White suffix /W
- For DALI Dimable suffix /DIM
- For Self-Contained 3hr emergency suffix /EMR
- For 3hr Self-test emergency suffix /ST
- For DALI EM-PRO 3hr emergency suffix /EMP

i.e. **IM/11/3255/4/S/B/DIM/EMP** = Imogen  
1170mm, Surface Black Luminaire, 3255lm, 24w, 4000k,  
DALI Dimmable c/w DALI EM-PRO 3hr emergency

### Accessories

- 2m Wire Suspension /IM/WSK

Part No.	W	L	lm/W	L
IM/11/1997/4	14	1997	141	1170
IM/11/2645/4	19	2645	139	1170
IM/11/3255/4	24	3255	135	1170
IM/14/3225/4	23	3225	135	1450
IM/14/4347/4	33	4347	131	1450
IM/14/5496/4	42	5496	129	1450

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

