


External Lighting

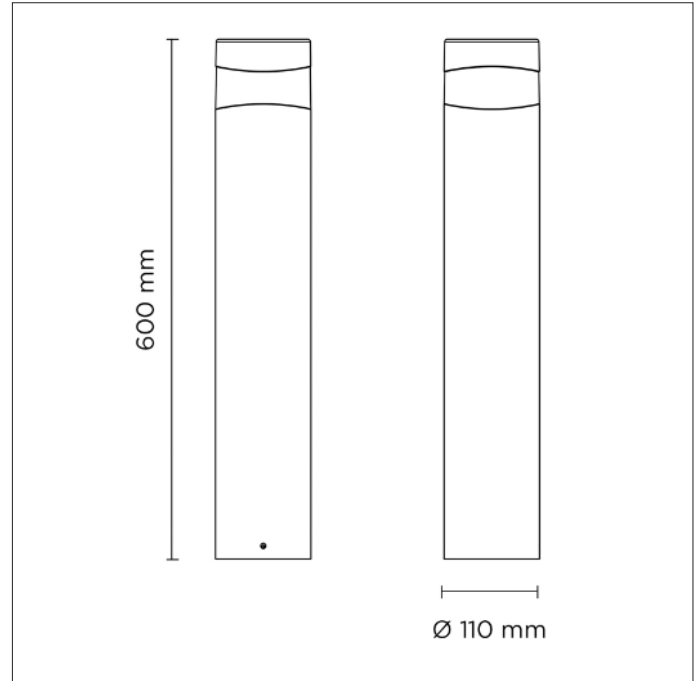

Key Features

- IP65 suitable for external environments
- Impact rating of IK10
- Beam angle : Symmetric, omnidirectional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam

Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **AMO/360/820/4/BLK** = Amon 360° LED Bollard, 820lm, 4k, Black.

Accessories

- Root Attachment **/BOU/ROOT**

Part No.	W	Lm	CCT	CRI	Weight
AMO/180°/410/4	6.5	410	4000k	80	4.0kg
AMO/360°/820/4	12	820	4000k	80	4.0kg

For more information, please contact Sales@ldl.lighting