


External Lighting

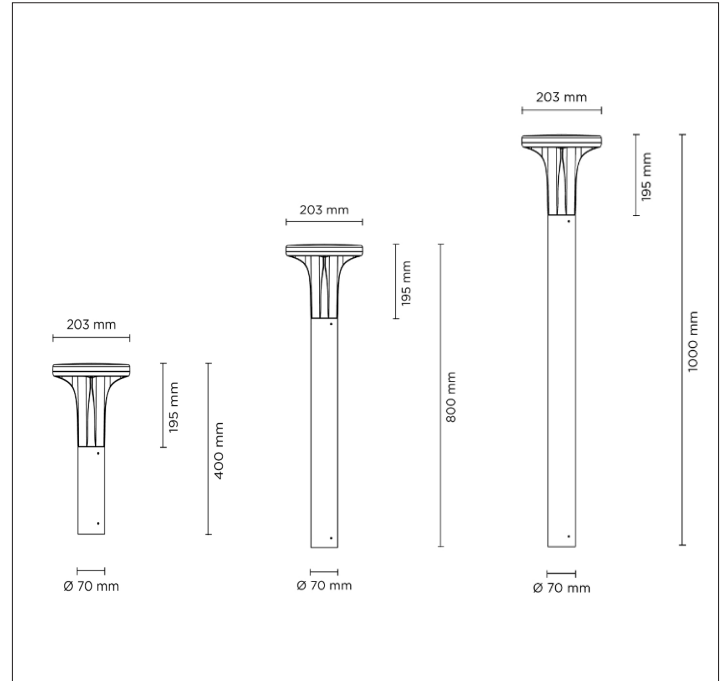

Key Features

- IP66 suitable for external environments
- Impact rating of IK09
- Beam angle : Symmetric, omni-directional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam

Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **OSI/M/1650/4/BLK** = Osiris, 1650lm, 4k, Black.

Accessories

- Root Attachment **ALD/ROOT**

Part No.	W	Lm	CCT	CRI	Weight
OSI/S/1650/4	20	1650	4000K	80	3.0kg
OSI/M/1650/4	20	1650	4000K	80	4.3kg
OSI/L/1650/4	20	1650	4000K	80	4.8kg

For more information, please contact Sales@ldl.lighting

