


Indoor Lighting

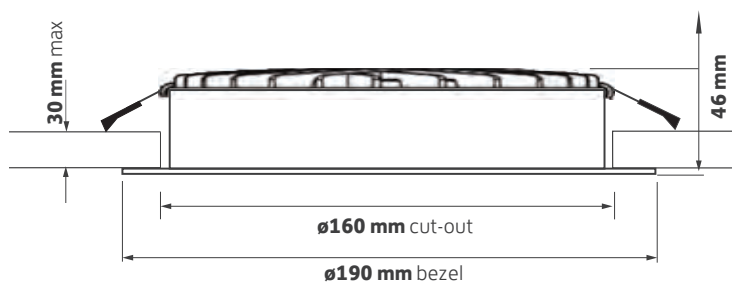

### Key features

- IP44
- Efficacy of up to 109lm/W
- Nominal life-time of > 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80

### Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For leading/trailing edge dimmable suffix: /MDIM
- For 3hr emergency suffix: /EMR
- For self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP

Part No.	Lm	W	Lm/W
----------	----	---	------

MAY/1200/3	1200	11	109
MAY/2275/4	2275	21	108

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

