


# Lily 2

## Downlighter

Innovation.  
Collaboration.  
Illumination.



Indoor Lighting

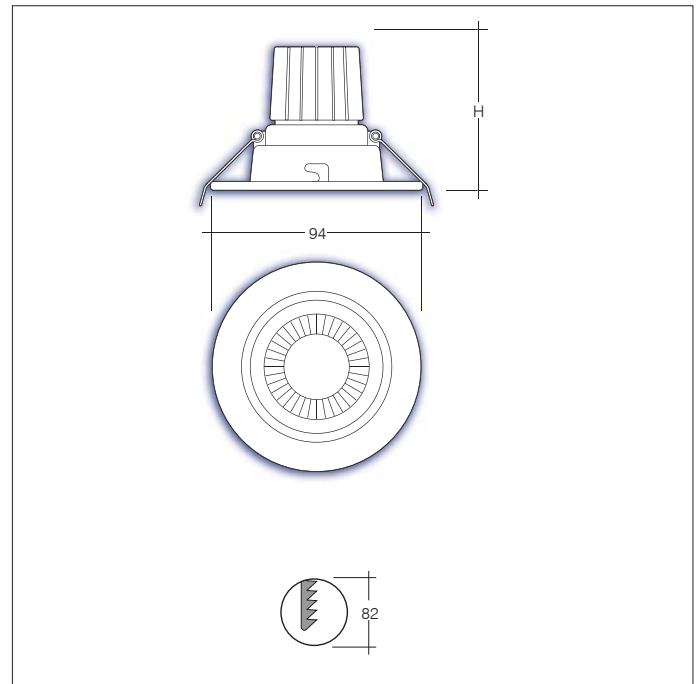

### Key features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 91m/W
- Nominal life-time of > 50,000 h (L70/B50)
- Colour stability with 3 step MacAdam
- Very high colour rendering index CRI > 90
- Emergency BLF = 254 lm

### Options

- For White bezel option suffix: /W
- For Chrome bezel option suffix: /CH
- For Satin Silver bezel option suffix: /SS
- For 24° suffix: /24D
- For 36° suffix: /36D
- For DALI dimmable option (DC only) suffix: /DIM
- For 3hr integral emergency: /EMR

\* GU10 available as 36° only

i.e. LIL/2/DC13/3/SS/36D/DIM =

Lily adjustable downlight, 1170lm, 13w, 3000K, satin silver finish, 36°, DALI dimmable

Part No.	Watt	Lm	CRi	CCT	H (mm)
LIL/2/AC10/2	10	710	90	2700	80
LIL/2/AC10/3	10	760	90	3000	80
LIL/2/AC10/4	10	810	90	4000	80
LIL/2/DC10/2	10	770	90	2700	65
LIL/2/DC10/3	10	840	90	3000	65
LIL/2/DC10/4	10	890	90	4000	65
LIL/2/DC13/2	13	1140	90	2700	75
LIL/2/DC13/3	13	1170	90	3000	75
LIL/2/DC13/4	13	1270	90	4000	75
LIL/2/GU10*	5	355	80	2700	85

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)