


Indoor Lighting

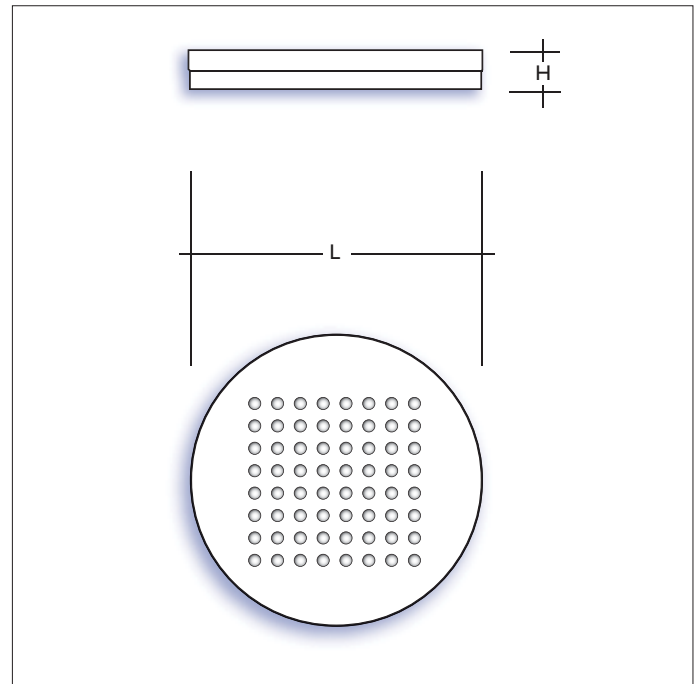

Key features

- IP20 suitable for internal environments
- Impact rating of IK06
- High colour rendering index CRI > 80

Options

- For 3000K colour temp suffix /83
- For 4000K colour temp suffix /84
- For 6000K colour temp suffix /86
- For grey base suffix /GRY
- For white base suffix /WHI

i.e. PIP/1500/83/WHI =
Pip surface LED, 3000k c/w White base

Part No.	W	Lm	Lm/W	H	L
PIP/1500/83	15	1493	97	27	210

For more information, please contact Sales@ldl.lighting

