
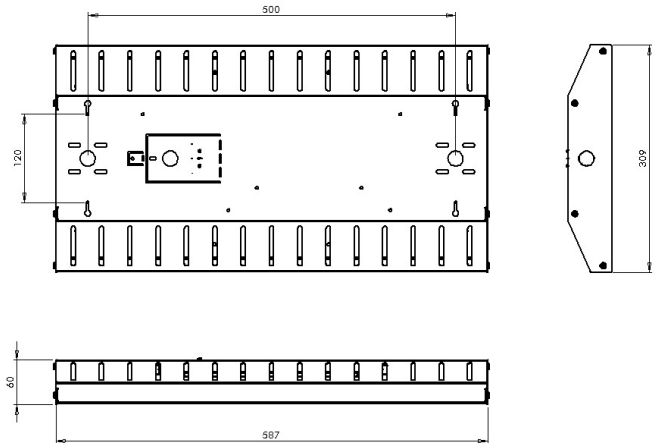


Indoor Lighting

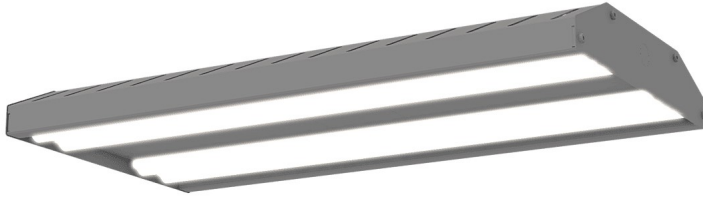

Options

- For 3000K optic suffix /3
- For 4000K optic suffix /4
- For 40deg optic suffix /40D
- For 60deg optic suffix /60D
- For 90deg optic suffix /90D
- For DALI dimmable suffix /DIM
- For casambi enabled suffix /CAS
- For PIR sensor suffix /PIR
- For emergency suffix /EMR
- For self-test suffix /ST
- For addressable emergency suffix /EMP

i.e. AXEL/S/90D/16778/4 =

Axel Small, 587mm, 90D optic, 16778lm, 109W, 4000K

Accessories

- Wire suspension kit 2m AXEL/WIRE/2M
- Wire suspension kit 5m AXEL/WIRE/5M
- Protective grille AXEL/GRILLE

Key Features

- IP20 suitable for internal environments
- Impact rating of IK08
- Nominal lifetime of > 72,000 h (L80/B10)
- Suitable for BESA Box, suspension and surface mounting

Part No.	W	Lm	Lm/W
AXEL/S/40D/7234/4	56	7234	130
AXEL/S/40D/9504/4	76	9504	126
AXEL/S/40D/14256/4	109	14256	130
AXEL/S/40D/20579/4	170	20579	126
AXEL/S/60D/8087/4	56	8087	145
AXEL/S/60D/10624/4	76	10624	141
AXEL/S/60D/15936/4	109	15936	146
AXEL/S/60D/19578/4	170	19578	140
AXEL/S/90D/8514/4	56	8514	153
AXEL/S/90D/11186/4	76	11186	148
AXEL/S/90D/16778/4	109	16778	153
AXEL/S/90D/23904/4	170	23904	141

For more information, please contact Sales@ldl.lighting

