


Outdoor Lighting

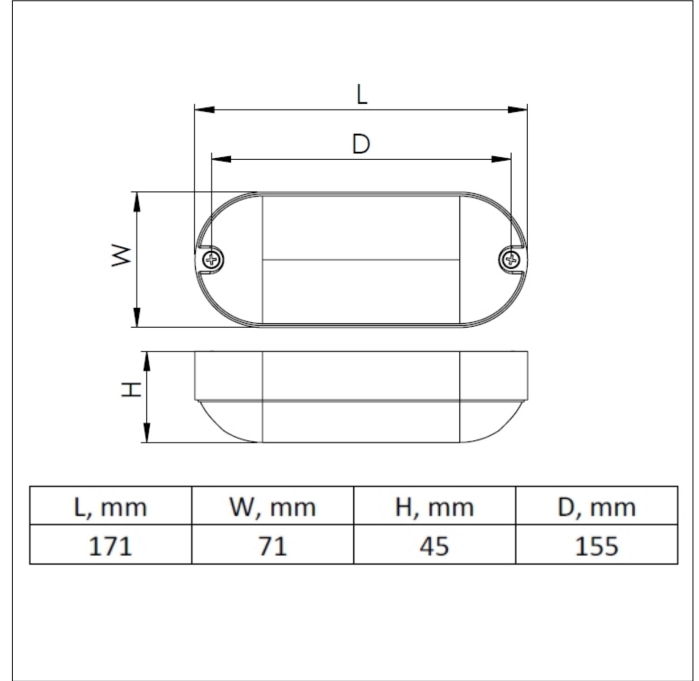

Key Features

- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 100lm/W
- Nominal life-time of 40,000 h (L70/B50)
- Colour stability with 3 step MacAdam

Options

- For DALI dimmable option suffix /DIM
- For 10% corridor function suffix /COR
- For integral sensor suffix /SEN
- For 3hr self-contained emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP

i.e. PUP/500/3/ST =

Pupice, 500lm, 5W, 3000K, self-test emergency

Part No.	Lm	W	Lm/W	CCT
PUP/500/3	500	5	100	3000K

For more information, please contact Sales@ldl.lighting