


# Darwin HO Bulkhead

## Exit Bulkhead

Innovation.  
Collaboration.  
Illumination.



Emergency

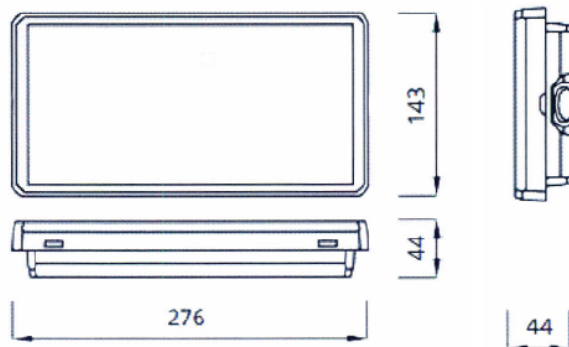

### Options

- For Maintained /M3
- For Non-Maintained /NM
- For 3hr self-test emergency suffix /ST
- For DALI Em-Pro /EMP
- For Central Battery 110-230V /CBU
- For Legend Kit /LEG

### Key Features

- Self-contained 3 hour emergency
- Surface mounted
- IP65 suitable for internal environments
- IK08 impact rating
- 6500k Colour Temperature
- Battery: 6.4V 1.6Ah LiFePO4 Cells
- Nominal life-time of > 50,000hrs
- Operating ambient temperature 0°c to +40°c

i.e. **DARW/HO/920/M3/WHI/EMP =**

Darwin High Output Bulkhead, 6W, 920lm, Maintained, DALI Em-Pro.

### Part No.

### Wattage

### Lm

DARW/HO/920	6	920
-------------	---	-----

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

