



Indoor Lighting

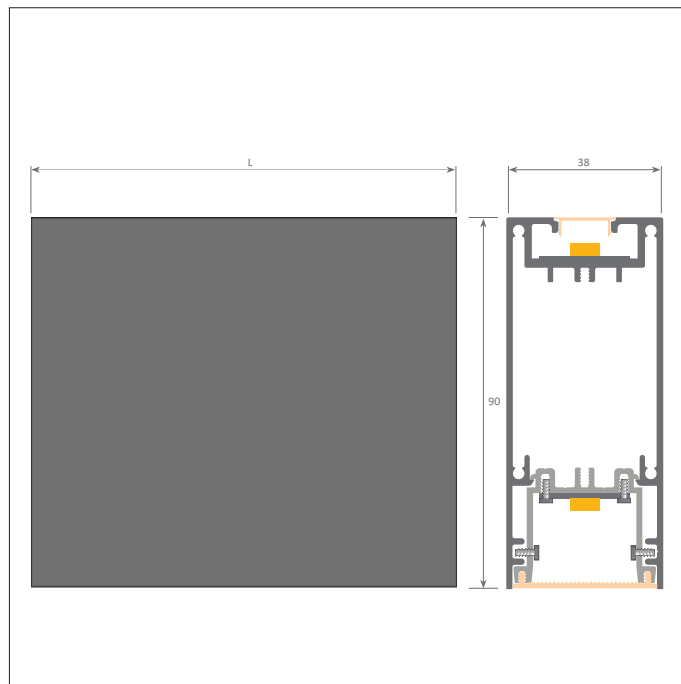

Key Features

- IP20
- Impact rating of IK06
- Efficacy of up to 95lm/W
- Nominal life-time of >72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 262 lm



Options

- For black finish suffix **/BLK**
- For grey finish suffix **/GRY**
- For white finish suffix **/WHI**
- For DALI dimmable suffix **/DIM**
- For Casambi enabled **/CAS**
- For 3hr integral emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For DALI addressable emergency suffix **/EMP**

i.e. **AN/S/11/2690/4/GRY/EMR =**
Anna LED, suspended/surface, 1130mm, 2687lm, 29W, 4000K, grey finish c/w 3hr emergency.

4000K as standard, 3000K supplied on request.
CRI > 80 as standard, CRI > 90 supplied on request.

Part No.	Lm	W	Lm/W	L (mm)
AN/S/11/920/4	922	11	83	1130
AN/S/11/1790/4	1791	20	91	1130
AN/S/11/2680/4	2685	30	90	1130
AN/S/14/1150/4	1152	13	87	1410
AN/S/14/2240/4	2239	24	93	1410
AN/S/14/3360/4	3356	35	95	1410
AN/S/16/1380/4	1383	16	87	1690
AN/S/16/2690/4	2687	29	93	1690
AN/S/16/4030/4	4027	42	95	1690

For more information, please contact Sales@ldl.lighting

Accessories

- Suspended / surface end cap **AN/ECS**
- Wire suspension kit (2m) **AN/WIRE**
- Wall bracket **AN/WALL**
- Coupler **AN/CPLR**

