


Indoor Lighting

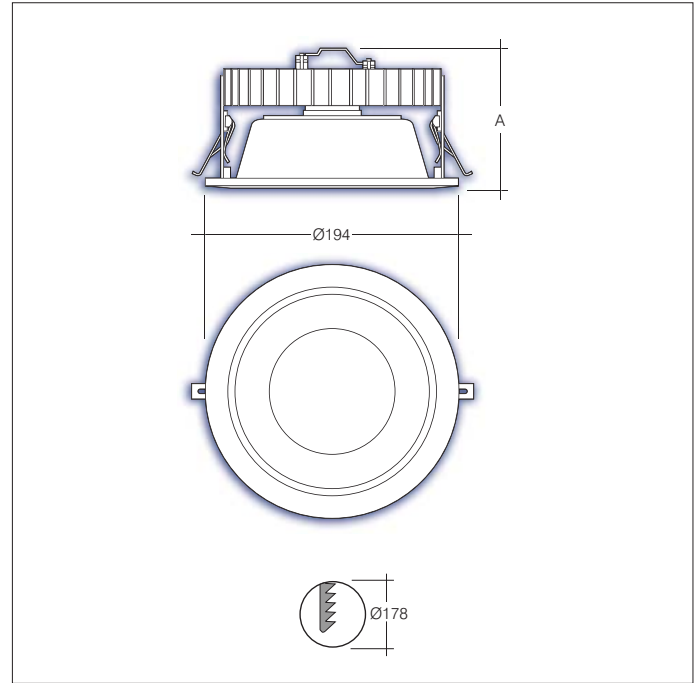

Overview

The Henry LED downlighter is a high quality downlighter ideal for corridors and general purpose areas.

A sand blasted aluminium reflector is fitted which produces a very wide optical performance making the range suitable for various applications.

The range incorporates both a 4000K and a 3000K colour temperature and the various configurations including DALI dimmable and integral emergency.

Options

- For DALI dimmable suffix /DIM
- For Tunable White suffix /TW
- For Casambi enabled suffix /CAS
- For wireless dimmable system suffix /WD
- For 3 hr self-contained emergency suffix /EMR
- For Monitor self-test emergency suffix /MON
- For DALI addressable emergency suffix /EMP
- For wireless addressable emergency suffix /WAE

i.e. **HEN/1500/4/DIM/EMR =**

Henry, 1541 lumens, 13W, 4000K, DALI dimmable c/w 3hr emergency

Key features

- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 130lm/W
- Nominal life-time of >50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 360 lm

Part No.	Watt	Lm	Lm/W	Weight	A (mm)
HEN/1100/3	10	1080	111	0.8kg	110
HEN/1100/4	10	1117	114	0.8kg	110
HEN/1500/3	13	1487	112	0.8kg	110
HEN/1500/4	13	1541	114	0.8kg	110
HEN/2000/3	19	2015	108	0.8kg	110
HEN/2000/4	19	2092	111	0.8kg	110
HEN/2300/3	18	2298	127	0.9kg	125
HEN/2300/4	18	2390	130	0.9kg	125
HEN/2700/3	22	2675	122	0.9kg	125
HEN/2800/4	22	2819	126	0.9kg	125
HEN/3200/3	26	3154	121	0.9kg	125
HEN/3200/4	27	3269	123	0.9kg	125

More outputs available, see www.LDL.lighting