


Indoor Lighting

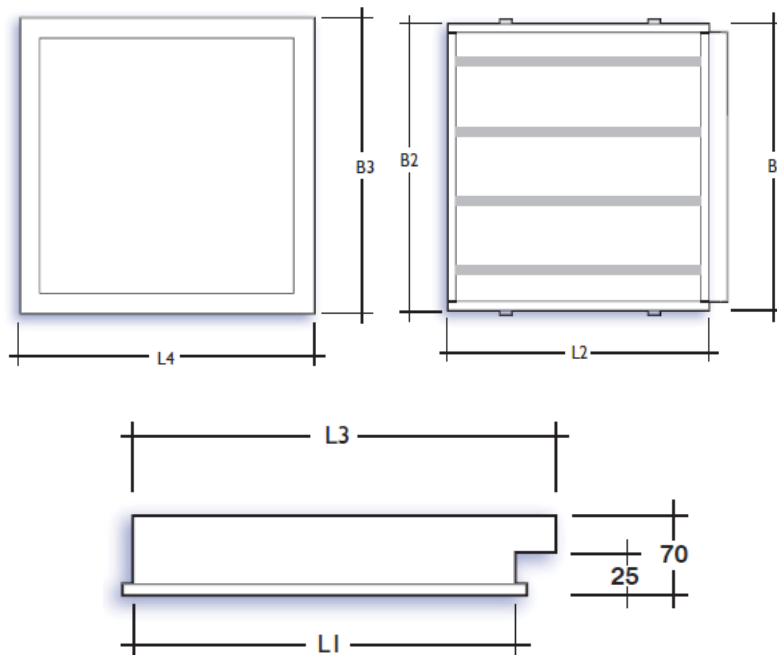


Key Features

- IP65 suitable for indoor environments
- Impact rating of IK10
- Efficacy of up to 127lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 282 lm

Options

- For 3000K suffix **/3**
- For DALI dimmable suffix **/DIM**
- For 3hr self-contained emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For 3hr self-contained DALI emergency suffix **/EMP**

i.e. **LDIP/OP/4/4253/DIM/EMR =**
LDIP 600x600 modular, 4000K, 4253 lumens, DALI dimmable c/w 3hr self-contained emergency



Nominal Length	L1	L2	L3	L4
1500	1435	1495	171	1500
1200	1135	1195	1171	1200
600	535	595	571	600

Nominal Width	B1	B2	B3
600	540	595	600
300	240	295	300

Part No.	Lm	W	Lm/W	CCT
LDIP/OP/2684/4	2684	21	127	4000K
LDIP/OP/3224/4	3224	25	126	4000K
LDIP/OP/3746/4	3746	30	124	4000K
LDIP/OP/4253/4	4253	34	123	4000K
LDIP/OP/4744/4	4744	39	121	4000K
LDIP/OP/5457/4	5457	46	118	4000K
LDIP/MP/2484/4	2484	21	117	4000K
LDIP/MP/2984/4	2984	25	117	4000K
LDIP/MP/3468/4	3468	30	115	4000K
LDIP/MP/3937/4	3937	34	114	4000K
LDIP/MP/4391/4	4391	39	112	4000K
LDIP/MP/5051/4	5051	46	109	4000K

For more information, please contact Sales@ldl.lighting