


Indoor Lighting

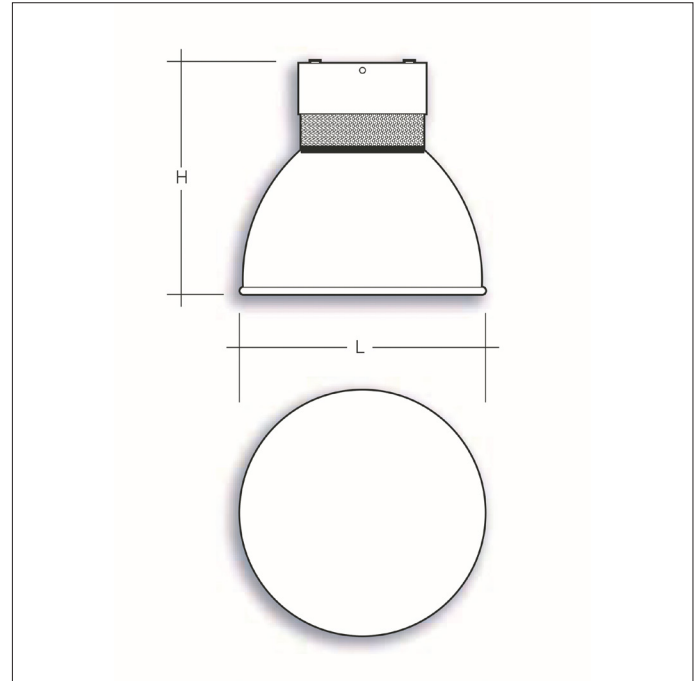

Key Features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 110lm/W
- Nominal life-time of 60,000 h (L70/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80

Options

- For 3000k colour temperature suffix **/3**
- For 4000k colour temperature suffix **/4**
- For DALI dimmable suffix **/DIM**
- For white gear housing suffix **/WHI**
- For grey gear housing suffix **/GRY**
- For black gear housing suffix **/BLK**

i.e. **MOL/3000/40/DIM/GRY** = Molly LED hibay, 3000 lumen, 4000K, DALI dimmable c/w grey housing.

Accessories

- For conical diffuser **/MOL/LENS**

Part No.	W	Lm	Lm/W	H	L
MOL/1100	10	1100	110	420	413
MOL/2075	20	2075	103	420	413
MOL/2975	30	2975	99	420	413
MOL/4550	46	4550	98	420	413

For more information, please contact Sales@ldl.lighting

