


Indoor Lighting

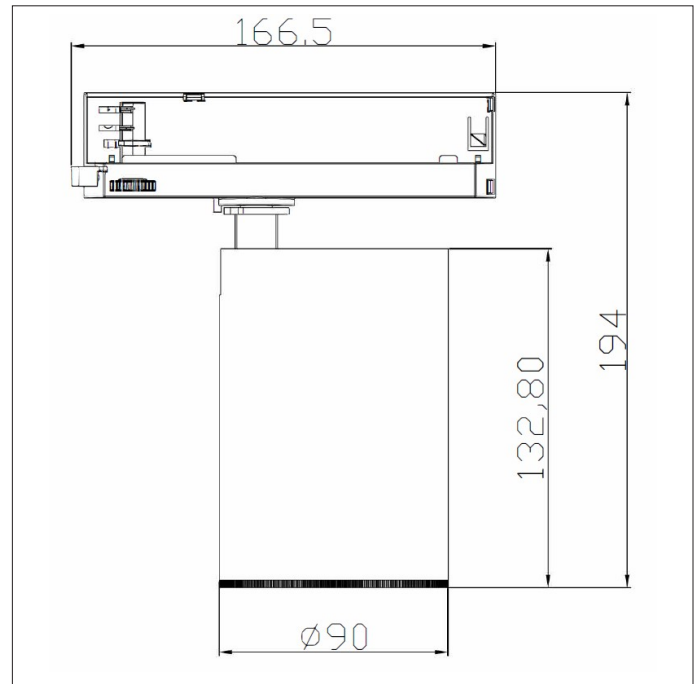

Key features

- Track mounted spotlight
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 123lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Surface mounting also available via ceiling rose

Options

- For 15° reflector suffix: /15D
- For 24° reflector suffix: /24D
- For 36° reflector suffix: /36D
- For 45° reflector suffix: /60D
- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF

i.e.: Leila Large Trackspot, 18W, 2268lm, 4000K, 36° reflector, black finish, Casambi enabled =

LEI/L/2268/4/36D/BLK/CAS


CRI 80 as standard, CRI 90 available on request.

For more information, please contact Sales@ldl.lighting


Part No. (3000K)	Lm	W	Lm/W
LEI/L/2089/15D/3	2089	18	116
LEI/L/3793/15D/3	3793	40	94
LEI/L/2133/24D/3	2133	18	118
LEI/L/3874/24D/3	3874	40	96
LEI/L/2177/36D/3	2177	18	120
LEI/L/3956/36D/3	3956	40	98
LEI/L/2121/45D/3	2121	18	117
LEI/L/3853/45D/3	3853	40	96
Part No. (4000K)	Lm	W	Lm/W
LEI/L/2176/15D/4	2176	18	118
LEI/L/3952/15D/4	3952	40	97
LEI/L/2222/24D/4	2222	18	121
LEI/L/4036/24D/4	4036	40	99
LEI/L/2268/36D/4	2268	18	123
LEI/L/4121/36D/4	4121	40	101
LEI/L/2210/45D/4	2210	18	120
LEI/L/4014/45D/4	4014	40	99

Indoor Lighting


15° Optic:

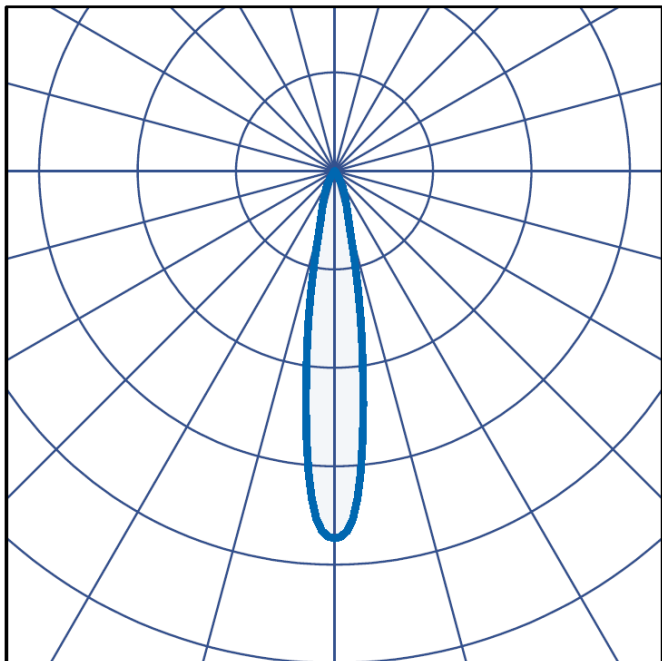

24° Optic:

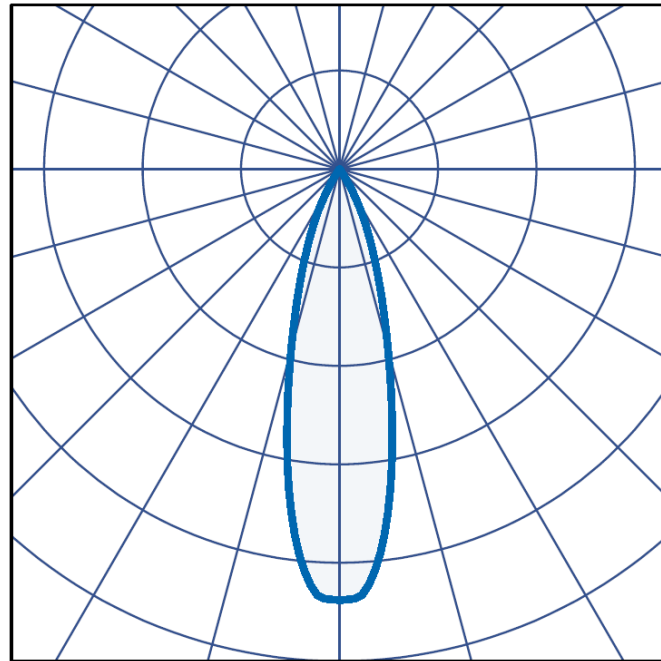

36° Optic:

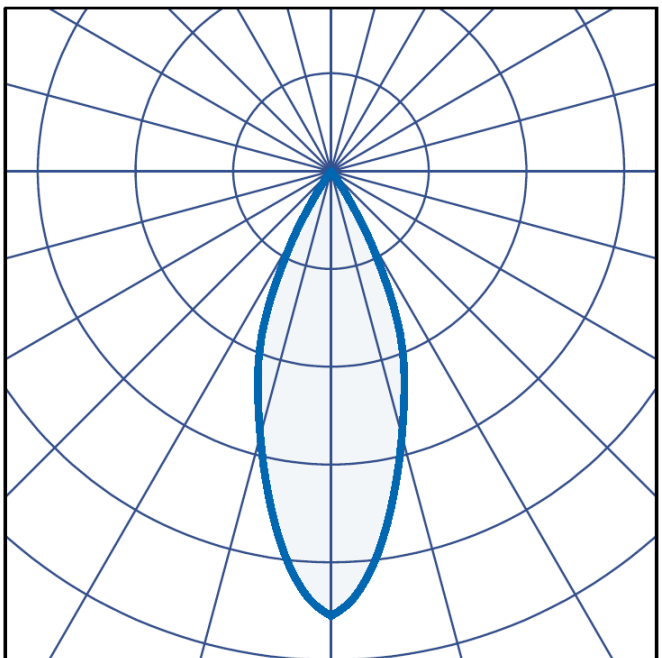

45° Optic:

