


Indoor Lighting

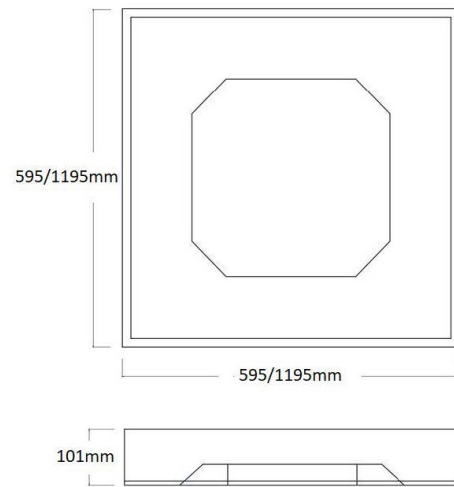

Key features

- IP44 as standard
- TP(a) rated
- Impact rating of IK05
- Efficacy of up to 120lm/W
- Nominal life-time of 50,000 h (L90/B10)
- High colour rendering index CRI > 80
- LG7 compliant
- UGR < 19

Options

- For DALI dimmable suffix /DIM
- For Casambi enabled suffix /CAS
- For 3hr emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For 3hr DALI emergency suffix /EMP
- For wireless addressable emergency suffix /WAE

i.e.: Rex , 27w, 3220lumens, 4000K, DALI dimmable c/w self-test emergency = **REX/3220/4/TPA/DIM/ST**

Part No.	W	Lm	Lm/W
REX/2100/4/TPA	17	2100	119
REX/3220/4/TPA	27	3220	119
REX/4193/4/TPA	36	4193	115

For more information, please contact Sales@ldl.lighting

