


Indoor Lighting

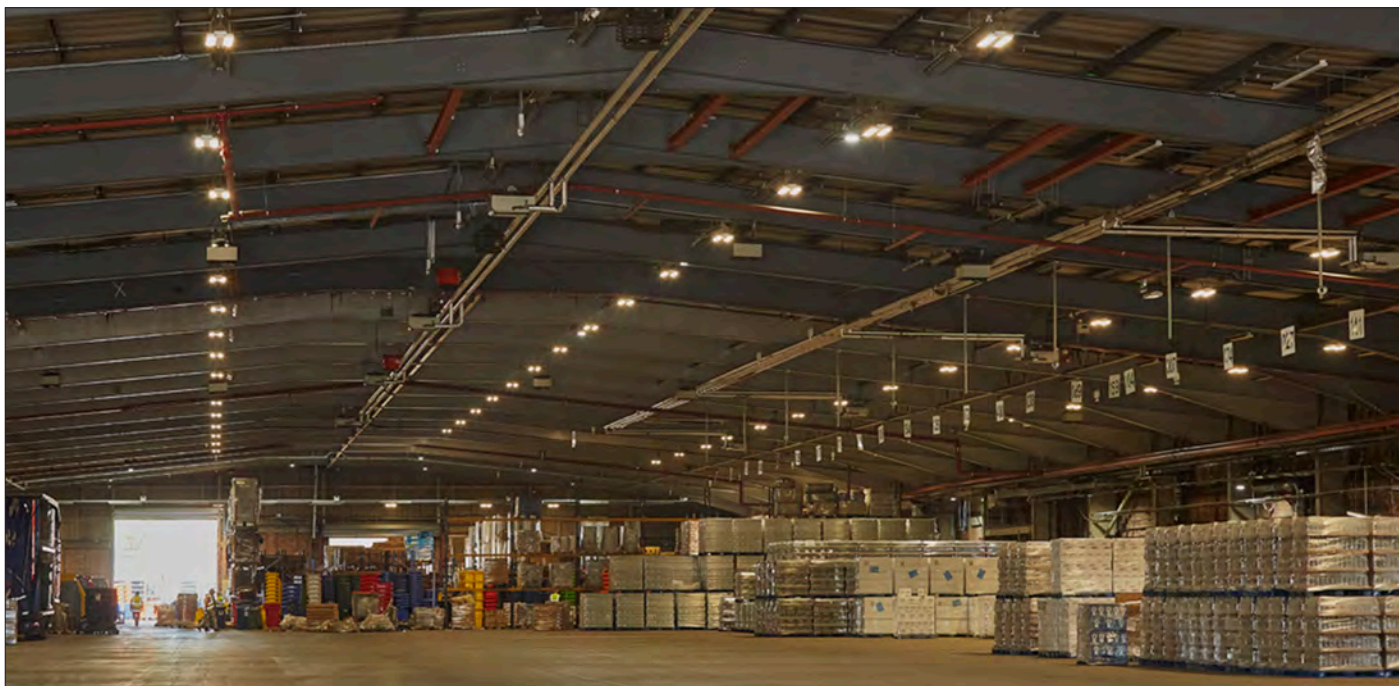

### Key Features



- Efficacy of up to 160 lm/W
- Nominal life-time of >50,000 hrs (L90/B10)
- Impact rating of IK08
- Colour stability with 3 step MacAdam
- Body and gear tray - aluminium extrusion
- Optics - polycarbonate
- Colours: Anodised Silver as standard, RAL 9003 White, RAL 9005 Black
- IP40 as Standard, IP65 available on request
- Lengths available: 320mm, 640mm and 960mm
- Emergency lumen output of 750 Lumens

### Options


- For DALI dimmable suffix
- For Casambi enabled suffix
- For 3hr emergency suffix
- For self-test emergency suffix
- For addressable emergency suffix
- For batten mount sensor
- For integral sensor\*
- \*not available on Skylar 1

### Accessories

- /DIM Wire suspension kit 2m SKY/WIRE/2M
- /CAS Wire suspension kit 5m SKY/WIRE/5M
- /EME Surface mount kit SKY/SURF
- /ST Trunking mount kit SKY/TRUNK
- /EMP
- /BSEN
- /SEN

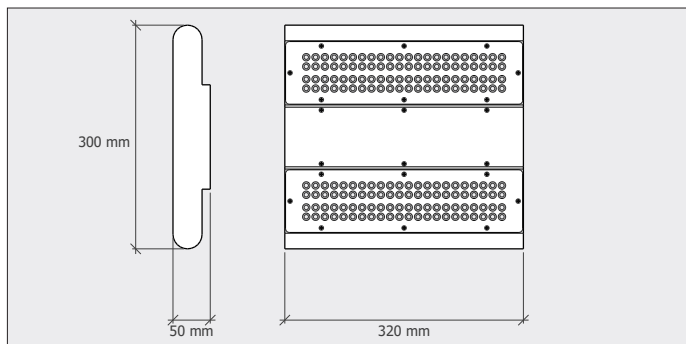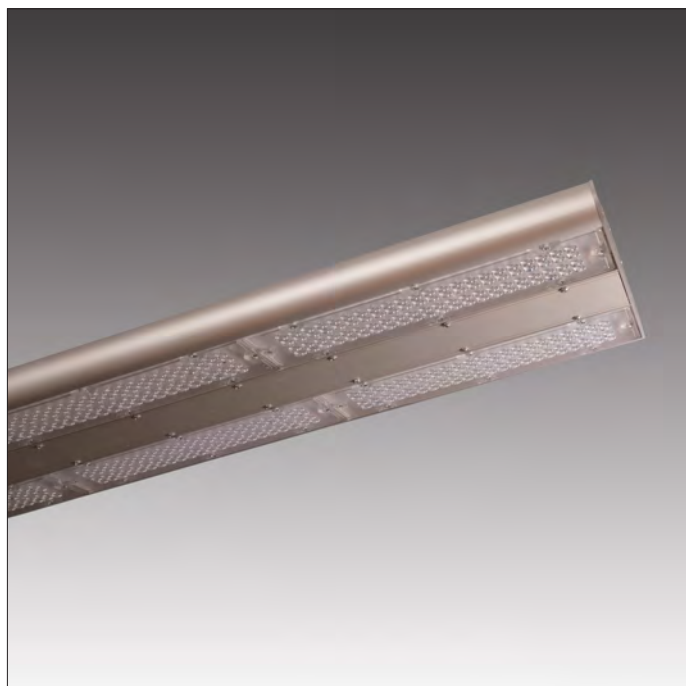


Indoor Lighting

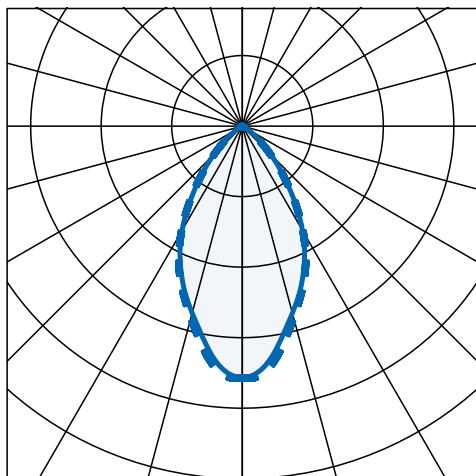


### 60° Optic

Part No.	Lm	W	Lm/W	Weight	L (mm)
SKY/1/60D/5000/4	5198	34	154	3.6 kg	320
SKY/1/60D/7000/4	7097	47	151	3.6 kg	320
SKY/1/60D/10000/4	9673	67	145	3.6 kg	320
SKY/1/60D/13000/4	13560	100	135	3.6 kg	320
SKY/2/60D/16000/4	16253	106	153	6.2 kg	640
SKY/2/60D/20000/4	19576	132	148	6.2 kg	640
SKY/2/60D/23000/4	23329	163	143	6.2 kg	640
SKY/2/60D/26000/4	26532	201	132	6.4 kg	640
SKY/3/60D/29000/4	28596	204	128	8.1 kg	960
SKY/3/60D/32000/4	31216	251	125	8.1 kg	960
SKY/3/60D/34000/4	33355	271	123	8.1 kg	960
SKY/3/60D/36000/4	35241	290	122	8.1 kg	960

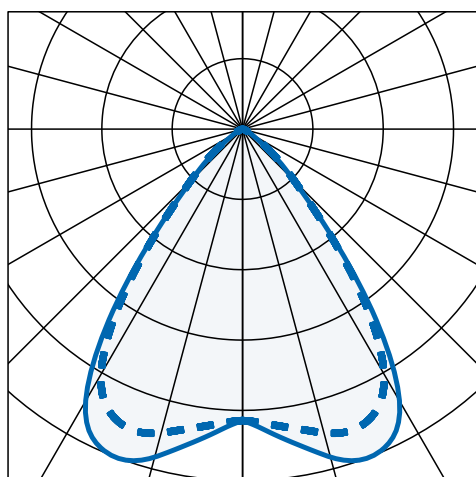


### 90° Optic


Part No.	Lm	W	Lm/W	Weight	L (mm)
SKY/1/90D/5000/4	5334	34	158	3.6 kg	320
SKY/1/90D/7000/4	7176	47	152	3.6 kg	320
SKY/1/90D/10000/4	9761	67	146	3.6 kg	320
SKY/1/90D/13000/4	13665	100	136	3.6 kg	320
SKY/2/90D/16000/4	16510	106	156	6.2 kg	640
SKY/2/90D/20000/4	20101	132	152	6.2 kg	640
SKY/2/90D/23000/4	23847	163	146	6.2 kg	640
SKY/2/90D/26000/4	27366	201	136	6.4 kg	640
SKY/3/90D/29000/4	29803	226	132	8.1 kg	960
SKY/3/90D/32000/4	32460	250	130	8.1 kg	960
SKY/3/90D/34000/4	34880	270	129	8.1 kg	960
SKY/3/90D/36000/4	36932	290	127	8.1 kg	960

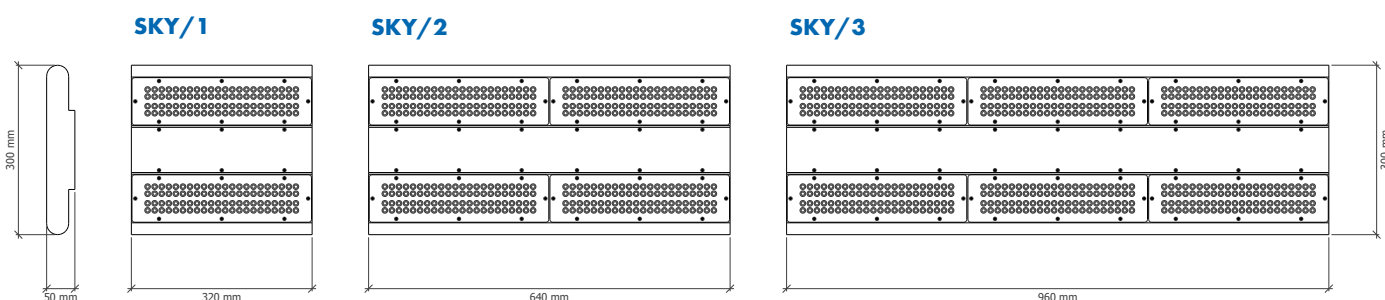

Indoor Lighting

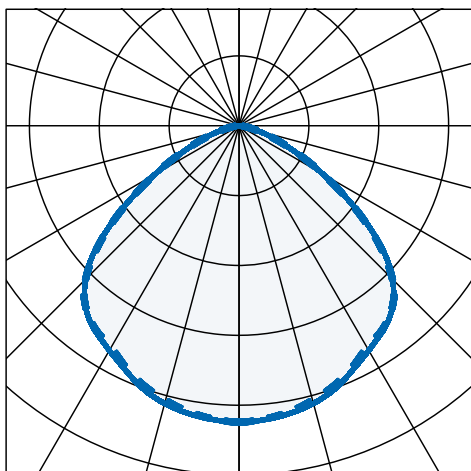

110° Optic					
Part No.	Lm	W	Lm/W	Weight	L (mm)
SKY/1/110D/5000/4	5324	33	160	3.6 kg	320
SKY/1/110D/7000/4	7163	47	152	3.6 kg	320
SKY/1/110D/10000/4	9743	67	146	3.6 kg	320
SKY/1/110D/13000/4	13640	100	136	3.6 kg	320
SKY/2/110D/16000/4	16480	106	156	6.2 kg	640
SKY/2/110D/19000/4	19485	132	148	6.2 kg	640
SKY/2/110D/23000/4	23779	166	143	6.2 kg	640
SKY/2/110D/26000/4	27280	201	136	6.4 kg	640
SKY/3/110D/29000/4	30378	226	135	8.1 kg	960
SKY/2/110D/32000/4	33086	250	132	8.1 kg	960
SKY/3/110D/34000/4	35553	270	132	8.1 kg	960
SKY/3/110D/36000/4	37644	290	130	8.1 kg	960

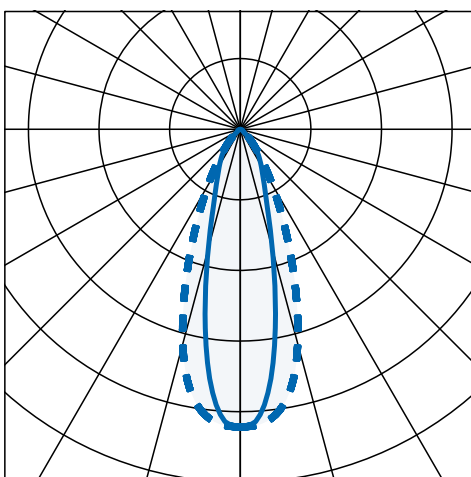

High Rack Optic					
Part No.	Lm	W	Lm/W	Weight	L (mm)
SKY/1/HR/5000/4	5113	34	152	3.6 kg	320
SKY/1/HR/7000/4	6935	47	148	3.6 kg	320
SKY/1/HR/10000/4	9551	67	143	3.6 kg	320
SKY/1/HR/13000/4	13338	100	133	3.6 kg	320
SKY/2/HR/16000/4	15951	106	150	6.2 kg	640
SKY/2/HR/20000/4	19402	132	147	6.2 kg	640
SKY/2/HR/23000/4	23111	163	142	6.2 kg	640
SKY/2/HR/26000/4	26041	201	130	6.4 kg	640
SKY/3/HR/29000/4	28540	224	127	8.1 kg	960
SKY/3/HR/32000/4	31013	249	125	8.1 kg	960
SKY/3/HR/34000/4	33070	269	123	8.1 kg	960
SKY/3/HR/36000/4	35066	290	121	8.1 kg	960

