


Indoor Lighting

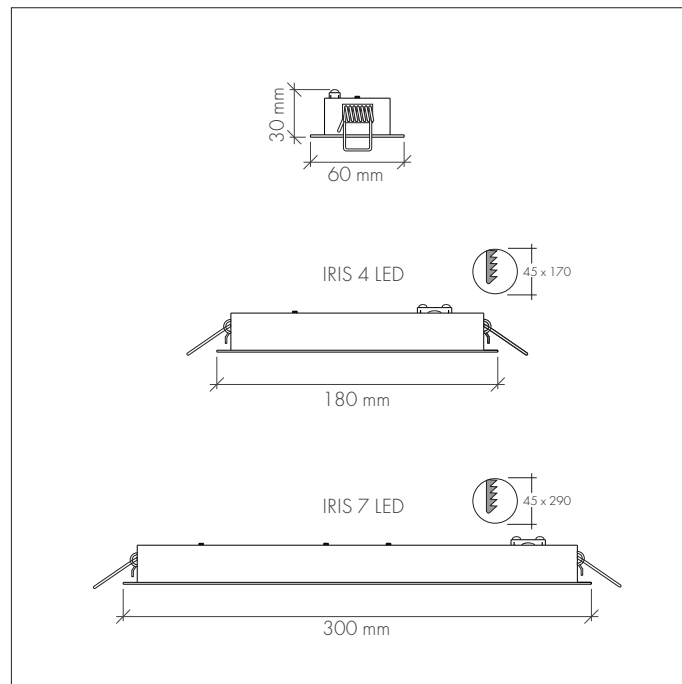

Key features

- IP20 suitable for internal environments
- Impact rating of IK07
- Material: PC white and black
- Efficacy of up to 137lm/W
- CRI >80 as standard, CRI >90 available
- Tunable white option
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Optical efficiency up to 92%
- Light emission angle 65° and 90° for high uniformity
- Optics with constant light colour over beam angle (CLC)
- UGR Optimized optics with grid

Options


- For black grid & 65° optic **IRIS/*B65**
- For black grid & 90° optic **IRIS/*B90**
- For white grid & 65° optic **IRIS/*W65**
- For white grid & 90° optic **IRIS/*W90**
- For DALI dimmable suffix **/DIM**
- For Casambi enabled suffix **/CAS**
- For wireless dimmable system suffix **/WD**
- For 3hr emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For 3hr DALI emergency suffix **/EMP**
- For wireless addressable emergency suffix **/WAE**

e.g.: **IRIS/R/4B90/900/4/EMR**

Iris recessed, 4 LED, black, 90°, 825 lm, 7.5 W, 4000K c/w 3 hr emergency

Part No.	W	Black grid		White grid		CCT
		65° Lm	90° Lm	65° Lm	90° Lm	
IRIS/R/4***/450/3	3.7	415	399	438	441	3000K
IRIS/R/4***/450/4	3.7	439	421	462	466	4000K
IRIS/R/4***/900/3	7.5	814	781	859	873	3000K
IRIS/R/4***/900/4	7.5	860	825	907	922	4000K
IRIS/R/4***/1200/3	9.8	1061	1046	1122	1150	3000K
IRIS/R/4***/1200/4	9.8	1120	1105	1185	1214	4000K
IRIS/R/7***/800/3	5.8	726	686	943	969	3000K
IRIS/R/7***/800/4	5.8	767	724	789	769	4000K
IRIS/R/7***/1500/3	11.9	1427	1354	1470	1477	3000K
IRIS/R/7***/1500/4	11.9	1507	1430	1552	1560	4000K
IRIS/R/7***/2000/3	15.9	1885	1770	1938	1945	3000K
IRIS/R/7***/2000/4	15.9	1991	1869	2046	2054	4000K

65° optic

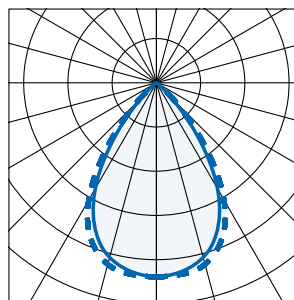

90° optic

