


Brooklyn

Premium Back-lit Panel

Innovation.
Collaboration.
Illumination.



Indoor Lighting

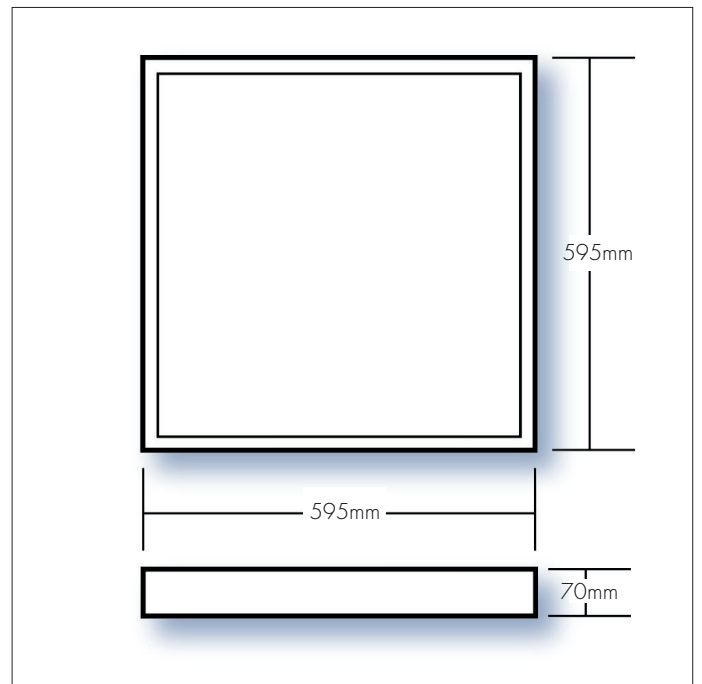

Key features

- IP20 suitable for internal environments
- Impact rating of IK08
- Efficacy of up to 126m/W
- Nominal life-time of 60,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser, 3mm polycarbonate TP(a)
- Microprism diffuser, 2mm PET TP(a)


Brooklyn

Premium Back-lit Panel


Innovation.
Collaboration.
Illumination.



Indoor Lighting

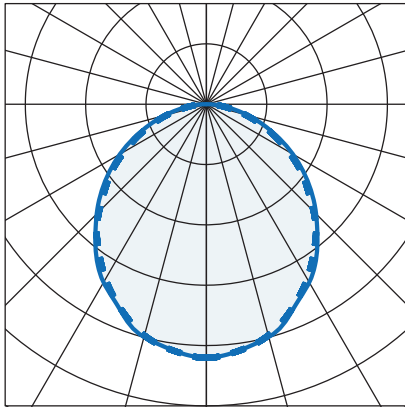

Frosted Opal					
Part No.	Lm	W	Lm/W	Weight	CCT
BRO/66/OP/1848/4	1848	14	127	6.1kg	4000K
BRO/66/OP/3292/4	3292	25	129	6.1kg	4000K
BRO/66/OP/4322/4	4322	34	125	6.1kg	4000K
BRO/66/OP/5500/4	5500	46	119	6.1kg	4000K

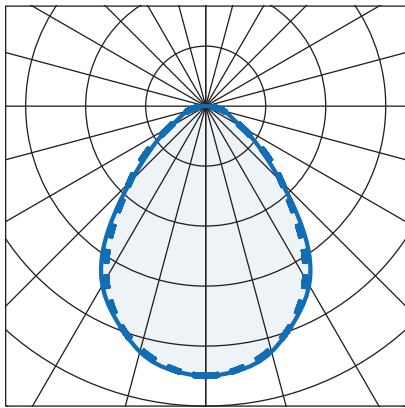

Microprism					
Part No.	Lm	W	Lm/W	Weight	CCT
BRO/66/MP/1717/4	1717	14	118	5.8kg	4000K
BRO/66/MP/3076/4	3076	25	120	5.8kg	4000K
BRO/66/MP/4027/4	4027	34	116	5.8kg	4000K
BRO/66/MP/5119/4	5119	46	110	5.8kg	4000K

Options

- 4000K supplied as standard /4
- For 3000K suffix /3
- For DALI dimmable system suffix /DIM
- For Casambi enabled suffix /CAS
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE

Accessories

- Wire suspension kit

BRO/WIRE

i.e.: Brooklyn, opal diffuser, 4322 lumens, 34W, 4000K, c/w 3 hr emergency
= BRO/66/OP/4322/4/EMR

CRI >80 supplied as standard, CRI >90 available upon request