


### Indoor Lighting

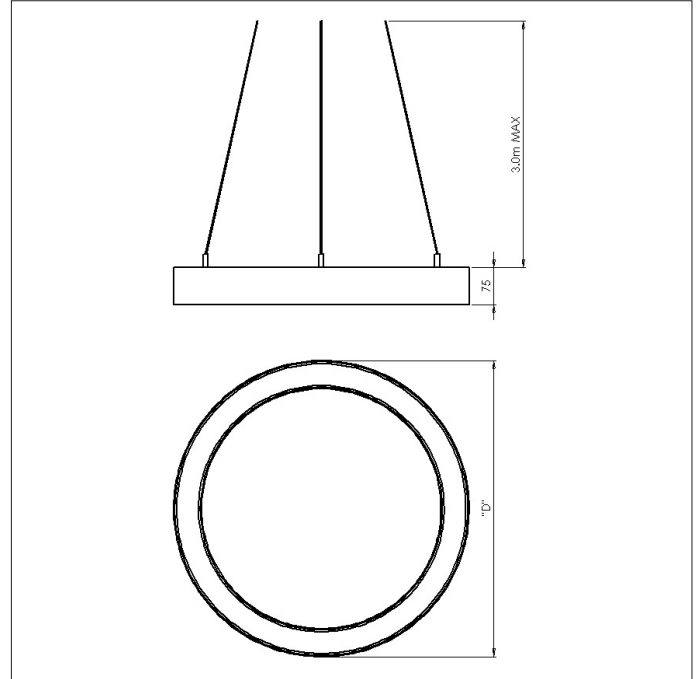


#### Key Features

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 123lm/W
- Nominal life-time of 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Custom sizes are also available on request

#### Options

- For DALI dimmable (600mm only) suffix **/DIM**

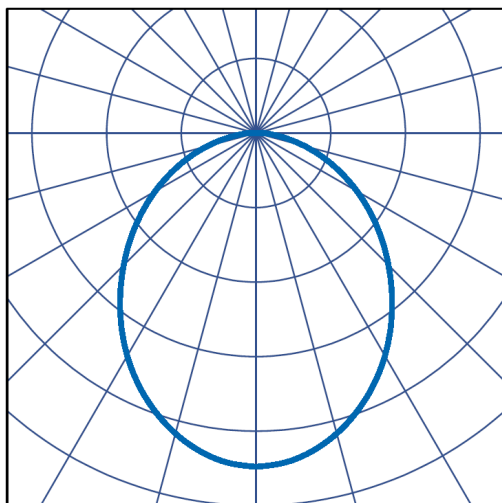

Part No.	Lm	W	Lm/W	D(mm)
POLO/6/1456/84	1456	12	122	ø600
POLO/6/2886/84	2886	24	119	ø600
POLO/6/4290/84	4290	37	116	ø600
POLO/12/3204/84	3204	26	123	ø1200
POLO/12/6350/84	6350	52	120	ø1200
POLO/12/9438/84	9438	80	117	ø1200

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)