


Indoor Lighting

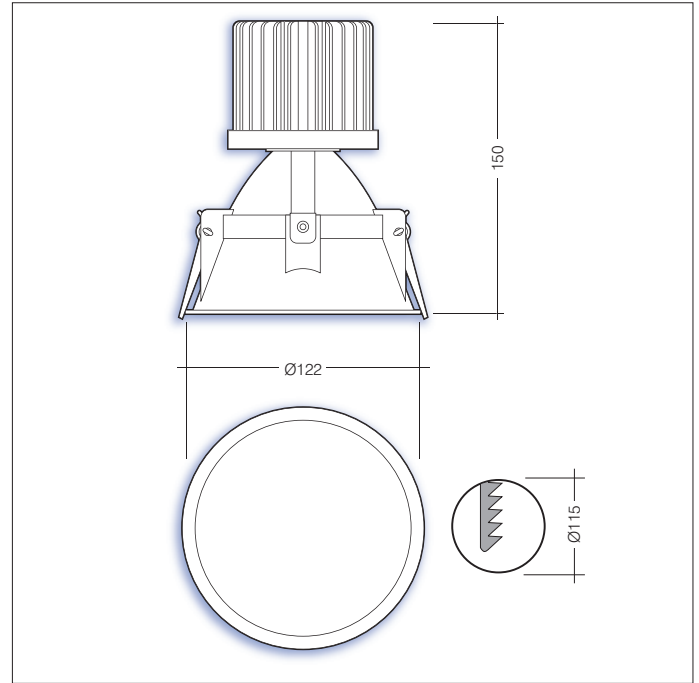

### Key features

- IP20
- Impact rating of IK04
- Efficacy of up to 91lm/W
- Nominal life-time of >50,000 h (L70/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 251 lm

### Options

- For a black finish suffix: /BLK
- For a white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For leading/trailing edge dimmable suffix: /MDIM
- For 3hr emergency suffix: /EMR
- For self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP

i.e. OSC/1310/50/3/BLK/CAS =


Oscar downlight, 1310 lumens, 14W, 50°, 3000K, black bezel & Casambi enabled.

CRI > 80 supplied as standard, CRI > 90 available on request.

Part No.	Lm	W	Lm/W	Beam	CCT
OSC/1140/25/2	1136	14	80	25	2700K
OSC/1200/25/3	1205	14	84	25	3000K
OSC/1250/25/4	1245	14	87	25	4000K
OSC/1210/50/2	1213	14	85	50	2700K
OSC/1270/50/3	1267	14	89	50	3000K
OSC/1310/50/4	1310	14	91	50	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

### 25° reflector



### 50° reflector

