

Millie Corners

Linear Surface

Innovation.
Collaboration.
Illumination.





Indoor Lighting



Key Features

- Efficacy of up to 126lm/W
- Nominal life time of 100,000 (L80,B10)
- Colour stability with 3 step MacAdam
- Body and gear tray - aluminium extrusion
- Opal frosted diffuser - polycarbonate TP(a)
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- IP20 as Standard, IP44 available on request

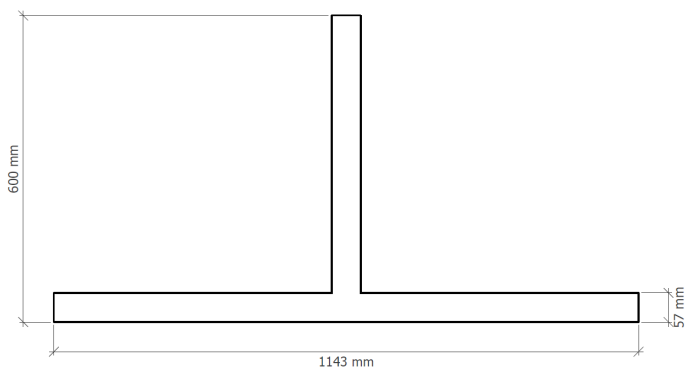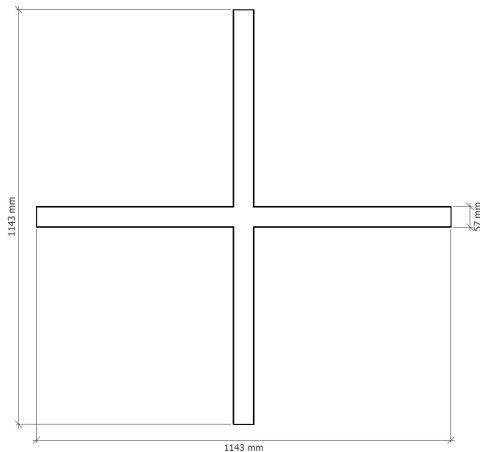


Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/S/COR/OP/1900/4	1900	18	106	1.14kg	600/543
MIL/S/COR/OP/2500/4	2540	22	115	1.14kg	600/543
MIL/S/COR/OP/3700/4	3780	30	126	1.14kg	600/543
MIL/S/COR/OP/5000/4	5000	40	125	1.14kg	600/543
MIL/S/COR/OP/6200/4	6200	22	124	1.14kg	600/543

Options

- 4000K supplied as standard
- For 3000K suffix
- For white RAL 9003 finish suffix
- For black RAL 9005 finish suffix
- For grey RAL 9006 finish suffix
- For DALI dimmable system suffix
- For Casambi enabled system suffix
- For wireless DALI suffix
- For 3hr integral emergency suffix
- For 3hr self-test emergency suffix
- For DALI addressable emergency suffix
- For wireless DALI addressable emergency

- /4
- /3
- /WHI
- /BLK
- /GRY
- /DIM
- /CAS
- /WD
- /EMR
- /ST
- /EMP
- /WAE

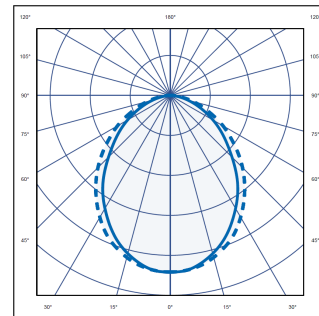

- i.e.: Millie, Suspended/Surface, Corner, Opal diffuser, 2540 lumens, 22W, 4000K, Black RAL 9005, Emergency = MIL/S/COR/OP/2500/4/BLK/EMR

