


Indoor Lighting

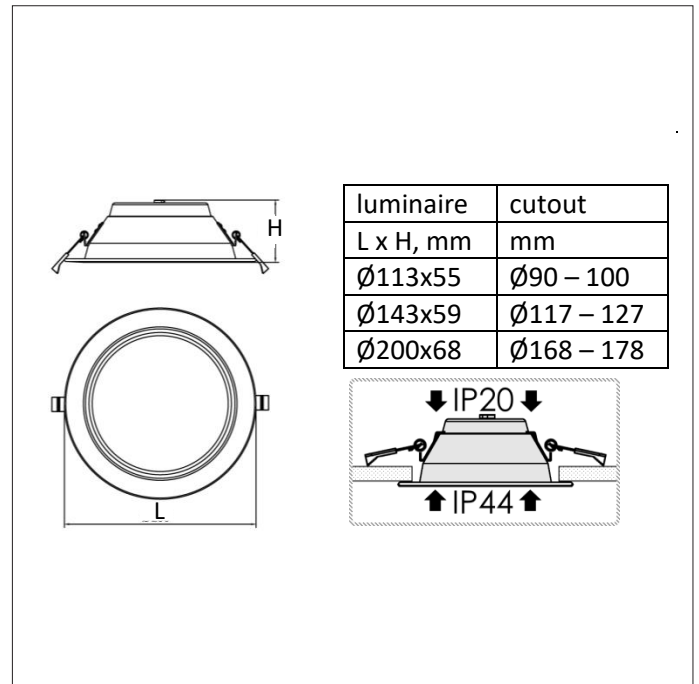

### Key features

- IP44 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 103lm/W
- Nominal life-time of > 50,000 h (L70/B10)
- Colour stability with 5 step MacAdam
- High colour rendering CRI >80
- Emergency BLF = 314 lm

### Options

- For DALI dimmable suffix: **/DIM**
- For Casambi enabled suffix: **/CAS**
- For leading/trailing edge dimmable suffix: **/MDIM**
- For 3hr emergency suffix: **/EMR**
- For self-test emergency suffix: **/ST**
- For DALI addressable emergency suffix: **/EMP**

i.e.: Crookes downlight, 14W, 1435lm, 4000K, DALI dimmable  
= **CRO/2/1400/4/DIM**

Part No.	Lm	W	Lm/W	Weight	CCT
CRO/1/1000/3	1000	10	100	0.3kg	3000K
CRO/1/1000/4	1025	10	103	0.3kg	4000K
CRO/2/1400/3	1400	14	100	0.4kg	3000K
CRO/2/1400/4	1435	14	103	0.4kg	4000K
CRO/3/2000/3	2000	20	100	0.7kg	3000K
CRO/3/2000/4	2050	20	103	0.7kg	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

