


Indoor Lighting

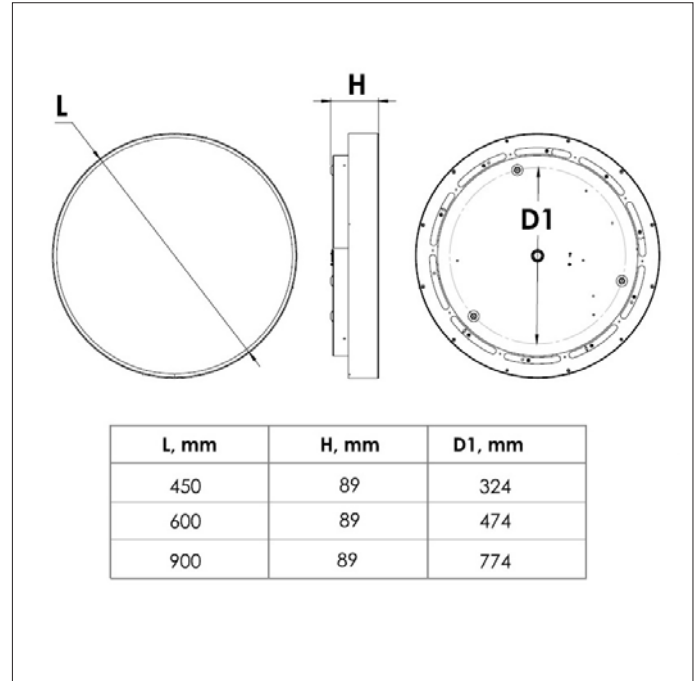

Key features


- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 158lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam

Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For wireless dimmable suffix: /WD
- For 3 hr emergency suffix: /EMR
- For self-test suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless addressable emergency suffix: /WAE
- For wire suspension kit suffix: /SUS

i.e.: Noma Ø600mm, 53W, 7658lm, 3000K =

NOM/6/7660/3

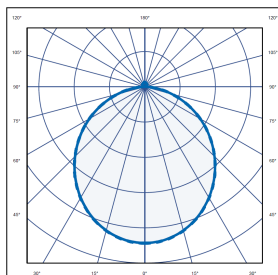

Part No.	Lm	W	Lm/W	Weight	CCT	L mm
NOM/4/3650/3	3652	26	141	4.7kg	3000K	450
NOM/4/3820/4	3824	26	151	4.7kg	4000K	450
NOM/4/5100/3	5095	36	142	4.7kg	3000K	450
NOM/4/5330/4	5334	36	152	4.7kg	4000K	450
NOM/6/5480/3	5480	38	145	7.9kg	3000K	600
NOM/6/5740/4	5737	38	155	7.9kg	4000K	600
NOM/6/7660/3	7658	53	146	7.9kg	3000K	600
NOM/6/8020/4	8017	53	156	7.9kg	4000K	600
NOM/9/8740/3	8741	59	147	13.8kg	3000K	900
NOM/9/9150/4	9152	59	158	13.8kg	4000K	900
NOM/9/11690/3	11688	80	147	13.8kg	3000K	900
NOM/9/12240/4	12237	80	157	13.8kg	4000K	900

For more information, please contact Sales@ldl.lighting