


Indoor Lighting

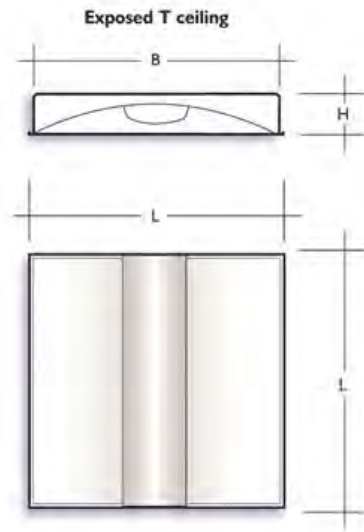

Key Features

- IP20 suitable for indoor environments
- Impact rating of IK04
- Efficacy of up to 142lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 380 lm
- LG7 compliant

Options

- For DALI dimmable suffix **/DIM**
- For self-contained emergency suffix **/EMR**
- For self-test emergency suffix **/ST**
- For DALI emergency suffix **/EMP**
- For Casambi enabled suffix **/CAS**

i.e. **ISLA/3600/84/DIM/EMP** =
Isla LED recessed luminaire, 3600lm, 25W, 4000K, DALI dimmable c/w DALI emergency

Part No.	W	Lm	lm/W	CCT	Weight (kg)	L(mm)	H(mm)
ISLA/2564/4	18	2564	142	4000k	3.2	595	85
ISLA/3092/4	21	3092	142	4000k	3.2	595	85
ISLA/3600/4	25	3600	140	4000k	3.2	595	85
ISLA/4031/4	29	4031	136	4000k	3.2	595	85
ISLA/4500/4	33	4500	134	4000k	3.2	595	85
ISLA/4984/4	37	4984	133	4000k	3.2	595	85

For more information, please contact Sales@ldl.lighting

