


### Industrial Lighting

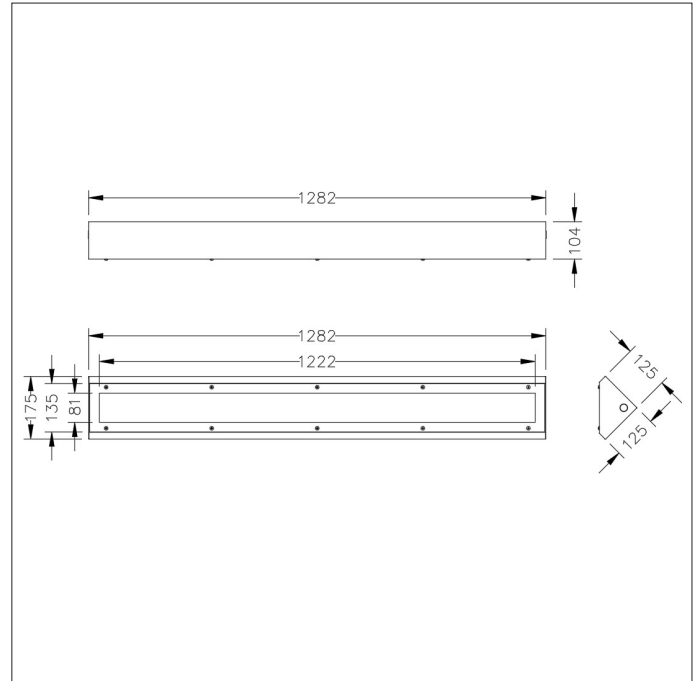

### Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For wireless dimmable system suffix: /WD
- For 3 hr integral emergency suffix: /EMR
- For Monitor self-test suffix: /ST
- For DALI addressable emergency suffix: /EMP
- For wireless addressable emergency suffix: /WAE
- i.e.: Wayland 1282mm, 5081 lumens, 34W, 4000K, DALI dimmable = **WAY/12/5000/4/DIM**

Part No.	Lm	W	Lm/W	CCT
WAY/12/3048/4	3048	19	162	4000K
WAY/12/5081/4	5081	34	151	4000K
WAY/12/7078/4	7078	49	144	4000K
WAY/17/3811/4	3811	23	164	4000K
WAY/17/6351/4	6351	42	151	4000K
WAY/17/8848/4	8848	62	144	4000K

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

### Key features

- IP65 suitable for harsh industrial environments
- Impact rating of IK10
- Efficacy of up to 164lm/W
- Nominal life-time of >50,000 h (L80/B10)

