
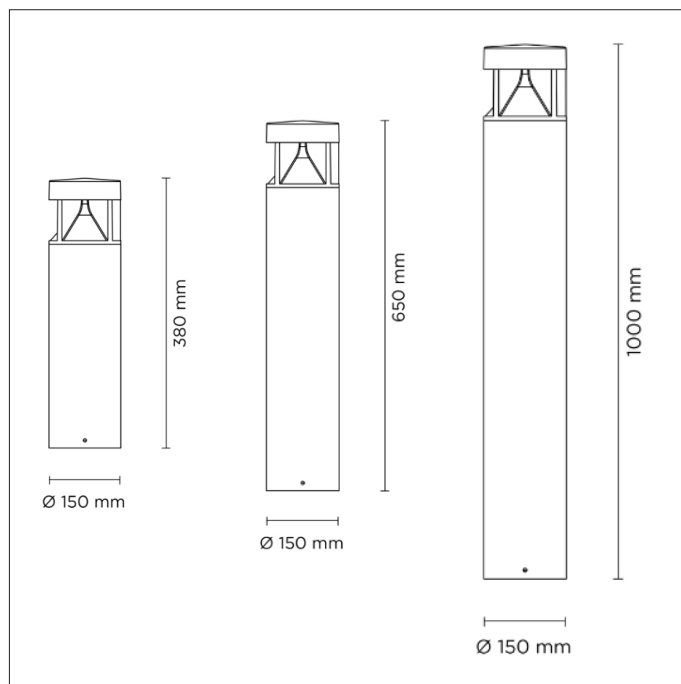


### External Lighting

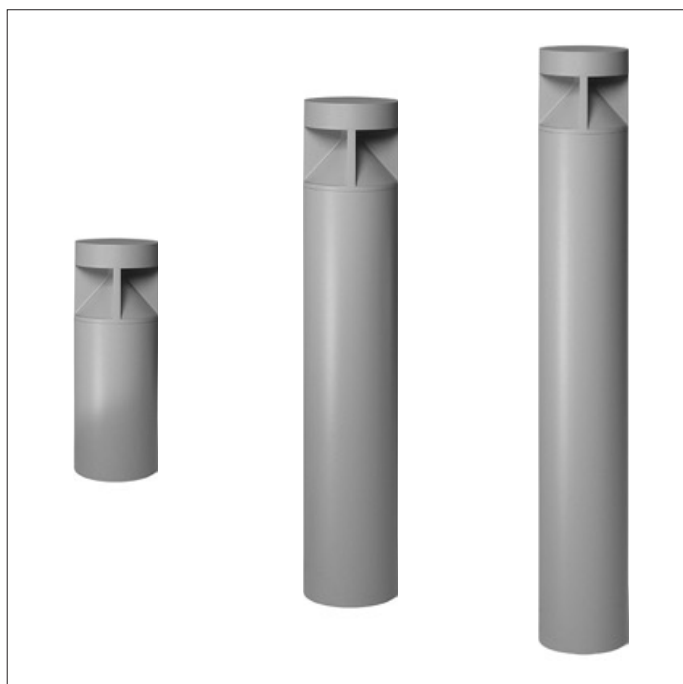

### Key Features

- IP66 suitable for external environments
- Impact rating of IK10
- Beam angle : Symmetric, omnidirectional
- Nominal life-time of 50,000 h (L90/B50)
- Colour stability with 3 step MacAdam

### Options

- For black option suffix **/BLK**
- For grey option suffix **/GRY**
- For asymmetric optic suffix **/AS**

i.e. **RHE/180/1100/4/BLK** =  
Rhea, 650mm, 180°, 1100lm, 4000k, Black.

### Accessories

- Root Attachment **/SEC/ROOT**

Part No.	W	Lm	CCT	CRI	Weight
RHE/90/550/4	6	550	4000k	80	8kg
RHE/180/1100/4	12	1100	4000k	80	8kg
RHE/270/1650/4	18	1650	4000k	80	8kg
RHE/360/2200/4	24	2200	4000k	80	8kg

For more information, please contact [Sales@ldl.lighting](mailto:Sales@ldl.lighting)

