


Leila S

Spotlight

Innovation.
Collaboration.
Illumination.



Indoor Lighting

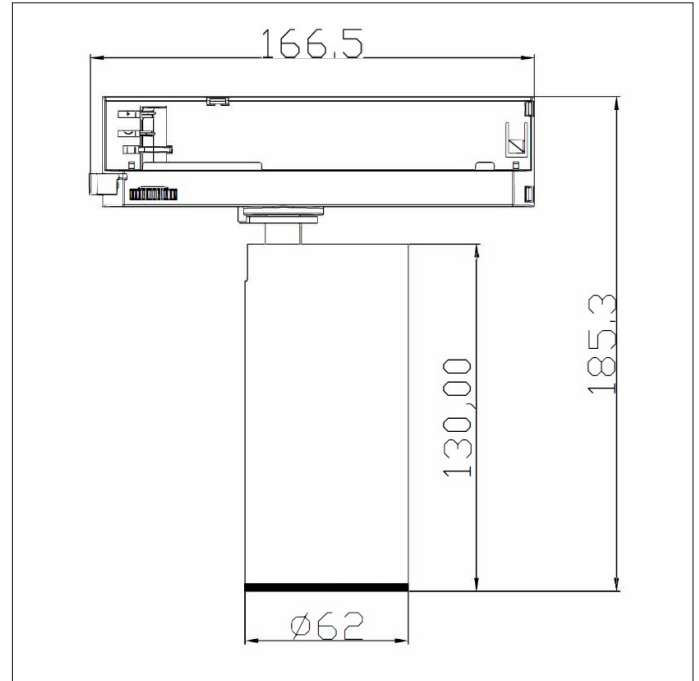

Key features

- Track mounted spotlight
- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 111lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Surface mounting also available via ceiling rose

Options

- For 15° reflector suffix: /15D
- For 24° reflector suffix: /30D
- For 40° reflector suffix: /45D
- For 50° reflector suffix: /60D
- For black finish suffix: /BLK
- For white finish suffix: /WHI
- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For Surface mounted: /SURF

i.e.: Leila Small Trackspot, 11W, 1280lm, 4000K, 40° reflector, black finish, Casambi enabled = **LEI/S/1280/4/40D/BLK/CAS**

CRI 80 as standard, CRI 90 available on request.

For more information, please contact Sales@ldl.lighting

Part No. (3000K)	Lm	W	Lm/W
LEI/S/1196/15D/3	1196	11	103
LEI/S/1786/15D/3	1786	20	89
LEI/S/1212/24D/3	1212	11	105
LEI/S/1811/24D/3	1811	20	90
LEI/S/1228/40D/3	1228	11	106
LEI/S/1836/40D/3	1836	20	91
LEI/S/1208/50D/3	1208	11	105
LEI/S/1806/50D/3	1806	20	90
Part No. (4000K)	Lm	W	Lm/W
LEI/S/1246/15D/4	1246	11	108
LEI/S/1861/15D/4	1861	20	93
LEI/S/1263/24D/4	1263	11	110
LEI/S/1887/24D/4	1887	20	90
LEI/S/1280/40D/4	1280	11	111
LEI/S/1913/40D/4	1913	20	95
LEI/S/1259/50D/4	1259	11	105
LEI/S/1882/50D/4	1882	20	94

Leila S


Spotlight

Innovation.
Collaboration.
Illumination.




Indoor Lighting


15° Optic:

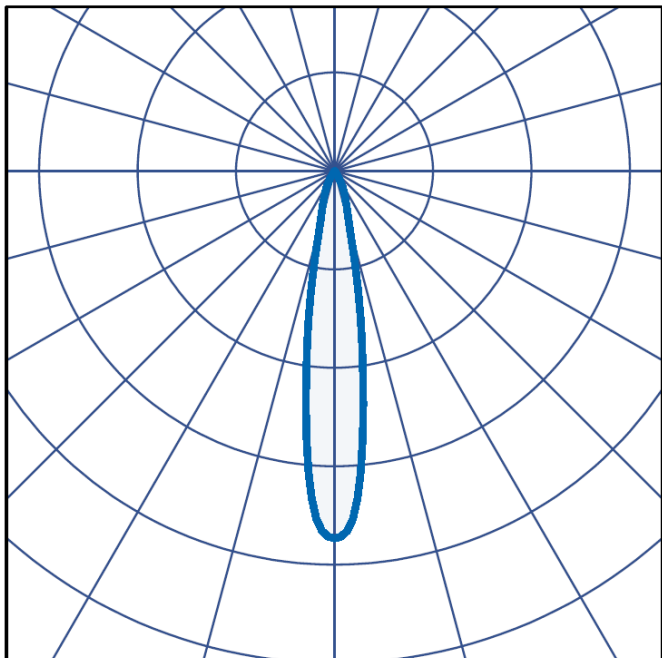

24° Optic:

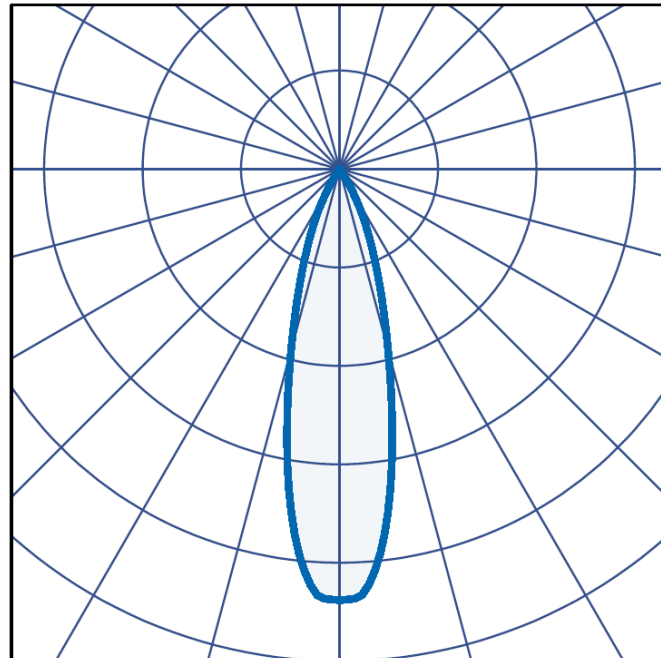

40° Optic:

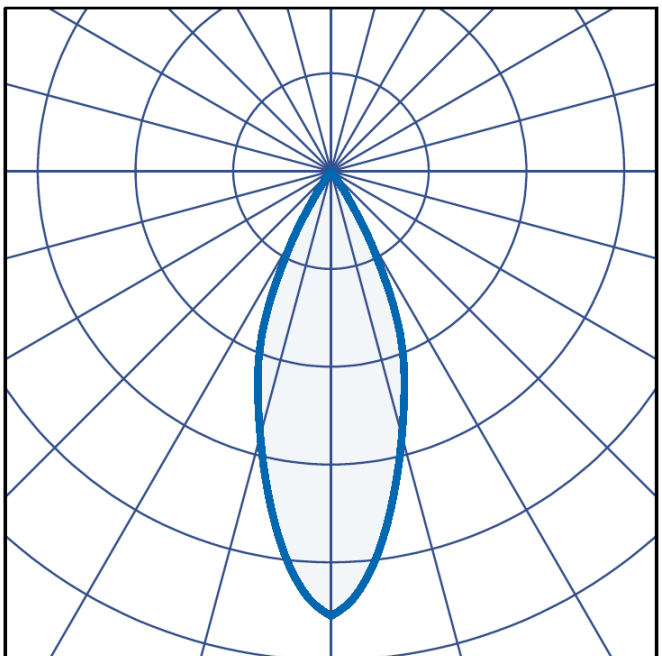

50° Optic:

