


Indoor Lighting

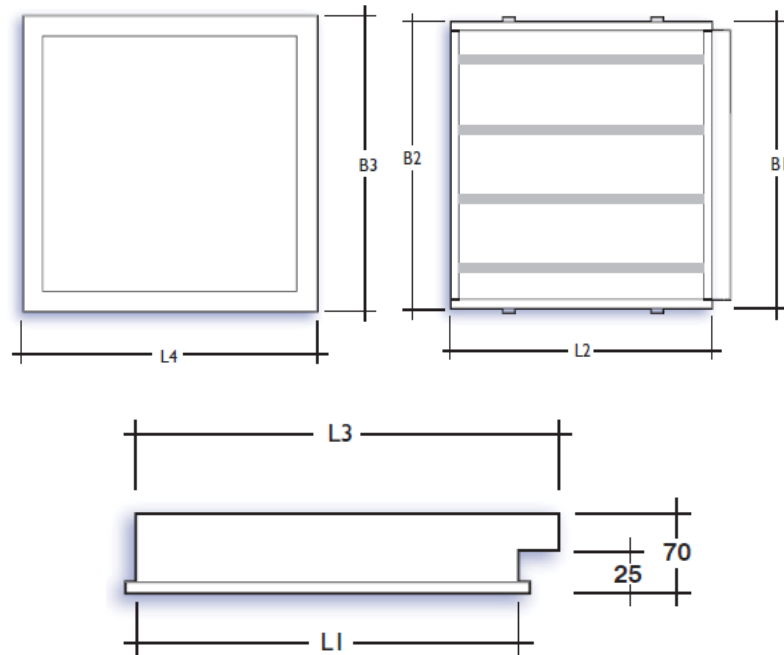

Key Features

- IP65 suitable for indoor environments
- Impact rating of IK10
- Efficacy of up to 120lm/W
- Nominal life-time of > 50,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 282 lm

Options

- For 3000K suffix **/3**
- For DALI dimmable suffix **/DIM**
- For 3hr self-contained emergency suffix **/EMR**
- For 3hr self-test emergency suffix **/ST**
- For 3hr self-contained DALI emergency suffix **/EMP**

i.e. **LDIP66/4/4170/DIM/EMR** =
IP65 600x600 modular, 4000K, 4169 lumens, DALI
dimmable c/w 3hr self-contained emergency

Nominal Length	L1	L2	L3	L4
1500	1435	1495	171	1500
1200	1135	1195	171	1200
600	535	595	571	600

Nominal Width	B1	B2	B3
600	540	595	600
300	240	295	300

Part No.	Lm	W	Lm/W	CCT	Weight
LDIP66/4/2610	2612	23	117	4000K	6.1 kg
LDIP66/4/3650	3651	32	114	4000K	6.1 kg
LDIP66/4/4600	4602	42	109	4000K	6.1 kg
LDIP126/4/5500	5499	45	123	4000K	9.7 kg
LDIP126/4/7690	7686	64	120	4000K	9.7 kg
LDIP126/4/9690	9688	84	115	4000K	9.7 kg

For more information, please contact Sales@ldl.lighting

